

1937

# INSTRUCTION BOOK

and

## ILLUSTRATED PARTS LIST

### FOR MODEL L

# GRAVELY TRACTOR

LSM SICKLE MOWER  
RP ROTARY PLOW

&

LR ROTARY MOWER  
OTHER ATTACHMENTS



#### SERVICE INFORMATION

When writing the factory for service information or repair parts, etc., make sure to refer to the model number and the tractor number of the unit. You will find this information on a nameplate similar to this print.

## Gravely Motor Plow and Cultivator Co.

DUNBAR, WEST VIRGINIA, U. S. A.

*Start  
With a* **GRAVELY** *End with  
a Profit!*

TO NEW GRAVELY OWNERS:

It's a pleasure to welcome you to the family of GRAVELY Tractor users. We appreciate your purchase. It is our sincere interest to see that you are satisfied with your machine, and we know that the best way to insure this is to make positive that you operate and care for the tractor properly.

Be sure and read all the instructions carefully. It will be profitable for you to take the time to do this.

Then if there is any special work that you require your tractor to do, don't hesitate to ask questions and let us help you in solving your problems.

Remember that our machine can be used for many purposes. For instance, as a garden tractor you will find a great many different types of tools and attachments that can be used to make it more efficient.

If you use your machine for mowing you will be interested in hearing that we can furnish you with different width cutter-bars as well as different sized guards. For instance; we have one bar that enables you to cut the grass almost as closely as you can cut with the Rotary Mower. You will also find it very profitable to keep the Sickle Knife always sharp. We offer a small Sickle Grinder that comes in handy for this purpose. We would also be glad to suggest extra parts and sections, or other small supplies which do not cost much but when they are needed, are very important.

Remember, this machine is driven by a gasoline motor. Regardless of how careful we might have been in its construction and how careful you might be in its operation, there is always the possibility that you may meet with some minor difficulty.

However, there is no reason to become unduly alarmed. We suggest that you get in touch with the Dealer or Representative through whom you purchased your machine. If you are unable to do this, then seek the advice of a good local mechanic.

In cases where you are unsuccessful in correcting your trouble, please let us hear from you immediately. We are sincerely anxious that every machine bearing our name gives real service and satisfaction to its users.

Let us repeat again our appreciation of your purchase and the importance of reading and following all the instructions.

Always feel at perfect liberty to write us about any matter pertaining to our machine.

Yours sincerely,  
GRAVELY MOTOR PLOW & CULTIVATOR COMPANY.

# GRAVELY

2 Forward Speeds  
and Reverse

Gas Throttle

5 H.P.  
GRAVELY MOTOR  
(own make)

Air Cleaner & Carburetor  
that keeps out dirt

High Tension  
Magneto with  
Impulse Starter

Automotive Type  
Steel Differential

1 1/2" Pneumatic  
Rubber Tires

Filter Strains Oil

Accessible Outside  
Clutch Adjustments

One Spot to  
Lubricate Both  
Motor & Trans.

Powered Direct From Motor  
through Gears  
No Bothersome Chains

Four Bolts to  
Fasten Any Power  
Attachment

**MODEL L GRAVELY TRACTOR**  
ALL ATTACHMENTS USED ON ONE TRACTOR  
SAFETY SLIP CLUTCH ON EACH ATTACHMENT

## OPERATION AND CARE OF THE MODEL L GRAVELY TRACTOR AND ITS ATTACHMENTS

**Explanation:** After calling each part by its name, this will be followed by two figures. For instance, Tank (160-P6), etc. The first figure refers to the photo number of the part as illustrated and the last figure to the plate number where it is shown. If you are not quite certain as to the part described look at the photo to make sure.

### UN-CRATING AND SETTING UP

The machine comes completely assembled ready to put on the needed attachments. Check the machine over when you uncrate it to make sure no parts have become loose or lost enroute. Use the photo as appears on Page 3 as a guide to see if all parts are in their proper place and also for additional steps that are to follow.

### FILL THE TANK WITH GASOLINE FILL WITH OIL

Remove Filler Cap (107-P-4) on the Chassis Top and pour in about five pints of good grade of motor oil. We recommend: For summer use Mobiloil "AF" SAE 40. In winter, Mobiloil "Arctic" SAE 20. This lubricates both the motor and final drive as well. Realize the importance of always keeping oil up to the proper level. To check this, have your machine sitting completely level. Notice on the right-hand side of the Chassis (100-P-4) a Try Cock Valve. Loosen this Valve. If Oil runs out, you have ample.

When using your tractor on extremely steep hills make positive that fully five pints are put in it so as to give ample supply when the machine is tilted at an angle.

Read carefully separate instructions furnished having to do with the Carburetor and Magneto. When first using the motor you will want to particularly notice the instructions on the Carburetor for choking, etc.

### CRANKING MOTOR

You must attach one of the attachments before attempting to start the motor. But we will tell you at this point the steps to go thru in starting it. Refer to Photo (418-P-9) showing Starting Strap. Wind this Strap clockwise (See arrow on casting) around the Fan Pulley (225-P-7) which is on the rear of the engine. Before spinning be sure both Clutch Levers on the right Handle are each in the middle or neutral position (by standing in a vertical position). We refer you to Plate No. 1, with the instructions as to the position of the Handles.

The Magneto on the motor is equipped with an Impulse Coupling. This means easier starting. A good spark can be produced without the necessity of too fast a spin. **GET A GOOD FIRM GRIP ON THE STARTING STRAP HANDLE WHEN CRANKING AND DON'T LET LOOSE OF THIS.** Experiment with the easiest method for you to crank. Some users find by backing the motor up so that it will be off of compression that they can crank much easier. Others prefer to spin faster. Use whichever method seems easier to you.

### SELECTING SPEEDS

You have two forward and two reverse speeds. **TO GO FORWARD IN LOW GEAR,** push left hand Clutch Lever (on right handle) as far forward as it will go. Then, pull right-hand Lever as far backward or downward as it will go. Your machine is now moving forward in low speed. **TO CHANGE TO HIGH,** simply pull left-hand Lever only as far backward and downward as it will go. **TO REVERSE,** pull right-hand Lever forward. Then, select low and high speed with left hand lever same as for forward travel. Refer to Fig. B Instruction Diagram on Plate 1.

- REMEMBER:**
1. Left-hand lever is selector, high and low travel speed.
  2. Right-hand lever is for forward and reverse.

### TRANSMISSION CLUTCH

A double-acting cone type Clutch is used. To take up for wear, simply tighten nuts on ends of Clutch Rods. After first using and wearing in, this might be necessary, but after that adjustment nothing should be needed for some time. Clutch will give ample warning by tendency to slip under load. Unless that happens do not tamper with it.

### ATTACHING TOOLS

You are referred again to illustration on Page 3. As shown, all Power Attachments (and most others as well) are bolted directly on front of Tractor by means of the four studs. The cultivating toolholder, snow plow, etc., are not power driven and do not require any clutch or meshing of gears.

When attaching power attachments make sure that the **THROWOUT LEVER (203 P-6) IS IN THE OUT POSITION.**

### POWER ATTACHMENT CLUTCHES

Each Power Attachment has an individual safety, slip clutch, which is adjusted by us and which should be just tight enough to stall engine. If this becomes loose take up tension spring. (See Plate 10 concerning this.)

### POWER ATTACHMENT THROWOUT LEVER

(Important that instructions are followed closely.)

This to be used to free mower when going to and from job, etc. Always idle motor and have control Levers in the position shown at Fig. C on instruction Diagram when putting in gear.

Immediately following is a list of parts in the L Tractor and certain service hints. Further in the Book is shown each of the main attachments used on the GRAVELY and suggestions for attaching and adjusting these.

### LUBRICATING SYSTEM

Oil to the Motor passes through drilled channels to the Crank Bearing. Oil passing from the ends of the Crank Bearing is thrown to the walls of the Case and upon falling back to the bottom is picked up by the Fly Wheels and thrown as a spray, lubricating all moving parts. The oil entering the Engine Case has no means of leaving except by being thrown as a spray and passed off through the Breather openings back to the Outer Case.

### OILING INSTRUCTIONS

When new the motor oil should be changed after the first 15 to 20 hours of running. After breaking in this changing should be according to usage. Working conditions as well as hours of running determine this. You should check oil as to the body and the amount of sediment in it and change accordingly. We would say it would be a good habit to form to change oil after every 50 hours of running.

The Oil Filter should be renewed twice a season. This too is dependent upon usage.

### TO CHANGE OIL

Remove the Drain Plug (108-P-4) on bottom of Chassis (100-P-4) and allow oil to drain. **IT IS WISE TO FLUSH OUT BY PRESSURE WHEN THIS IS DONE.** Replace the Plug before refilling.

### VALVE TOP OIL

When the motor is new and being run in, use Mobil Upperlube Valve Top Oil mixed with the gasoline and as instructions found with such oil. **IT IS ALSO WISE TO USE THIS AFTER THE MACHINE IS STORED AWAY FOR ANY LENGTH OF TIME AND THERE IS A POSSIBILITY OF PARTS RUSTING.**

## THINGS TO DO TO AVOID TROUBLE

This is possibly the most important part of the instruction book. Unless the user reads and follows out the points which follow we cannot be responsible in case of trouble. The proverbial "ounce of prevention" truly applies to machinery of this type.

### CHECKING OIL PUMP

The first, and every time, you start the motor make sure the oil pump is working. Remove the Filler Cap (107-P-4) to see if a good steady stream is coming forth. **IF IT ISN'T DO NOT OPERATE THE MOTOR ANY LONGER UNTIL THIS IS REMEDIED.**

**REMEDIES:** 1. Check for Air leaks around Intake Oil Line (260-P-7) and connections (259 & 267-P-7) connecting from the motor to the chassis.

2. Check Oil Line: (260-P-7) to make sure it isn't stopped up. Many times this obstruction is found in Oil Strainer Body (257-P-7). To clean this body, remove 6 Axle Housing Bolts (109-P-4) on left side of tractor and pull out axle housing (102-P-4), and in this you can get in so to see the Oil Strainer body. Without removing make sure that oil screen on bottom of oil strainer body hasn't clogged up. If it is clogged the strainer body must be removed. This is done by first loosening the intake oil strainer nut (258-P-7). Then the body can be worked out the left side of tract.

In cases where lack of oil has caused your motor to burn out a bearing or connecting rod when you replace these **BE SURE AND CHECK THIS CLOGGING OF OIL.** If that has caused your first trouble, even replacing new parts will not be the remedy.

**DO NOT RUN MOTOR AT FULL SPEED UNTIL IT HAS BEEN RUN FOR AT LEAST A WEEK.**

**HAVE A REGULAR PERIOD TO GO OVER THE ENTIRE MACHINE AND TIGHTEN NUTS AND BOLTS THAT WILL BECOME LOOSE.**

**CHECK OFTEN FOR WEAR ON PARTS AND GET NEW ONES BEFORE OLD ONES BECOME WEAK AND BREAK.** Such a breakage is liable to cause damage to other parts.

### AIR CLEANER

Because of the abrasive effect of dust on all moving parts of the engine, and its effect on carbon deposits in the cylinder, it is of the utmost importance that you keep your Air Cleaner in place and see that all connections are tight. **WE CANNOT MAKE OUR GUARANTEE VALID UNLESS THESE INSTRUCTIONS CONCERNING THE AIR CLEANER ARE STRICTLY ADHERED TO.**

Instructions as to the amount of oil to be used with your Air Cleaner are on the Air Cleaner itself. Be sure to check the Air Cleaner after each day's use to see that it contains the proper amount of oil.

It is a good idea to clean your Air Cleaner itself frequently before adding fresh oil. Remember that should your Air Cleaner become clogged from dirt or dust, you are doing the same thing as running your tractor without any protection at all.

When the Tractor is used under dusty or similar conditions you should regularly clean the outside of the motor too, removing all waste that will cling around the cylinder fins especially.

## THINGS TO DO IN CASE OF TROUBLE

**ENGINE HARD TO START:** This may be due to any of the following: Improper carburetor adjustment; faulty ignition; interrupter contacts too wide; spark plug dirty; or points improperly spaced. Read separate instructions on carburetor and magneto adjustment. Store the machine in a warm dry place in winter. If engine is too hard to start when cold remove the spark plug, and inject a small quantity of gasoline into cylinder.

**ENGINE FLOODED:** If when cranking engine you notice a vapor coming from the exhaust, more particularly when it is hot, it is due to excess gasoline and it will not start until this excess is eliminated from the cylinder. Often you can help this by cranking the motor backwards so as to blow this out.

**ENGINE OVERHEATS:** This may be due to insufficient oil supply; improper carburetor adjustment; magneto timing to engine too late; cylinder fins clogged; fan not working properly; excessive carbon in cylinder, etc.

**ENGINE LOSES POWER:** If the compression is poor, with a resultant loss of power, it may be remedied by the following: Reseat valves if leaking. Check Valve Tappets and adjust if necessary. Be sure the Piston Rings are not stuck in the grooves. If the compression loss is due to worn piston and rings, it will be necessary to replace these with new ones. If the cylinder is badly worn, it will be advisable to send it back to the factory to have it rebored and fitted with new and oversize piston and rings.

**ENGINE STOPS SUDDENLY:** If engine has been running nicely and stops suddenly, first see that you have gasoline in the tank. Remove spark plug and lay it on top of cylinder with cable connected. If you have a good spark, disconnect gasoline line from carburetor and see that gas flows freely. It may be possible there is dirt in the carburetor, or the lines may be plugged.

### TIMING L MODEL ENGINE

The two outside marks on the Idle Gear (45—P2) are matched with marks on the Cam Shaft Gears (43—P2). The crank is used over the center Idle Gear mark.

To time magneto points, remove Cylinder Head (61—P3) and set the magneto coupling so that the impulse kicks off when the Piston (66—P3) reaches top dead center on compression stroke.

To determine the compression stroke, crank engine slowly until Piston travels upward with both valves closed.

(The usual cause for timing to be off is by the coupling nut slipping on the Impulse Coupling of the Magneto. To set, you will back up the Coupling Nut. Then, lightly tap the Coupling with a hammer to loosen so that you can move the Magneto Timing.)

### CHECKING ADJUSTMENT


Spark Plug Points should be cleaned and checked for clearance and set with a gap of .022". Valves should be checked for carbon or other like material that might get into the seats and cause leakage. Also, valves should be given .008" clearance between Valve Stem and Valve Plunger.

### CARE OF TIRES

Always keep 35 to 40 pounds pressure in the tires. Lower Pressure might possibly allow slippage on the rim thereby pinching and damaging the valve inlet ruining the tire inner tube.

Remember that these tires, whether ground-grip or all-weather type, have an inner tube and should thus be treated exactly like your automobile tire. Should trouble develop, remove the wheel with the six rim bolts and repair the tire just as you would that of an automobile.

MODEL - L-8 - L-R - INSTRUCTION DIAGRAM

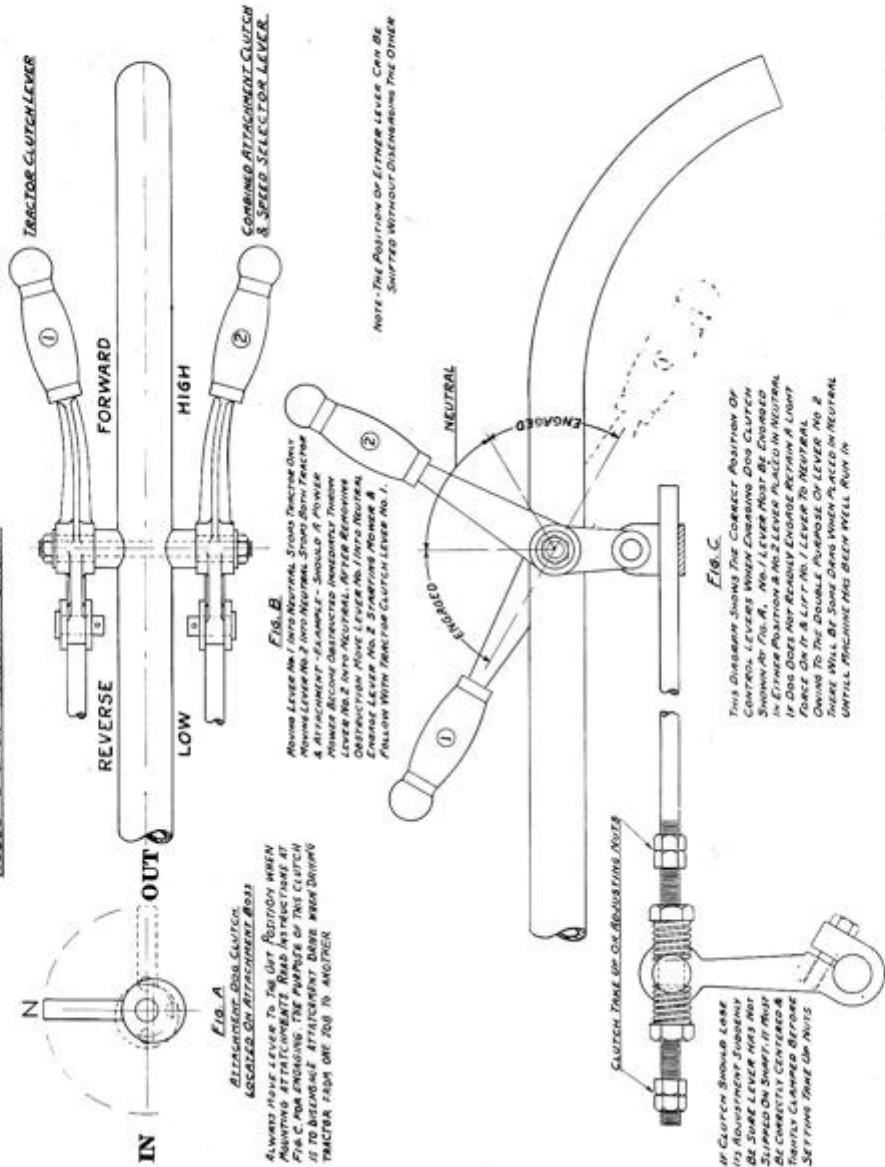

General Motors Power & Gas Division Co. Grosse Pointe, Mich. U.S.A.

PLATE 2—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
1	L-101	Outer crank case	\$10.40	13	L-113	Fly wheel nut lock	.04
2	L-102	Inner crank case	9.60	14	L-114	Drive pinion bearing	1.35
3	L-103	Bearing & pump cap	1.12	15	L-115	Timing pinion bearing	2.55
4	L-104	Fly wheel	3.68	16	L-116	Crank case bolts, long	.08
5	L-105	Crank pin	1.84	17	L-117	Crank case bolts, short	.08
6	L-106	Spreader bolt	.24	18	L-118	Crank case stud bolts	.08
7	L-107	Spreader bolt washer	.24	19	L-119	Crank case nut	.02
8	L-108	Spreader bolt nut	.02	20	L-120	Dowell	.12
9	L-109	Drive pinion shaft	3.52	21	L-122	Fly wheel oil scraper	.16
10	L-110	Timing pinion shaft	2.80	22	L-128	Scraper bolt with nut & washer	.01
11	504-K	Fly wheel key	.02	23	108-S	Bearing cap bolt	.05
12	L-112	Drive wheel nut	.06	24	L-124	Bearing cap dowell	.04

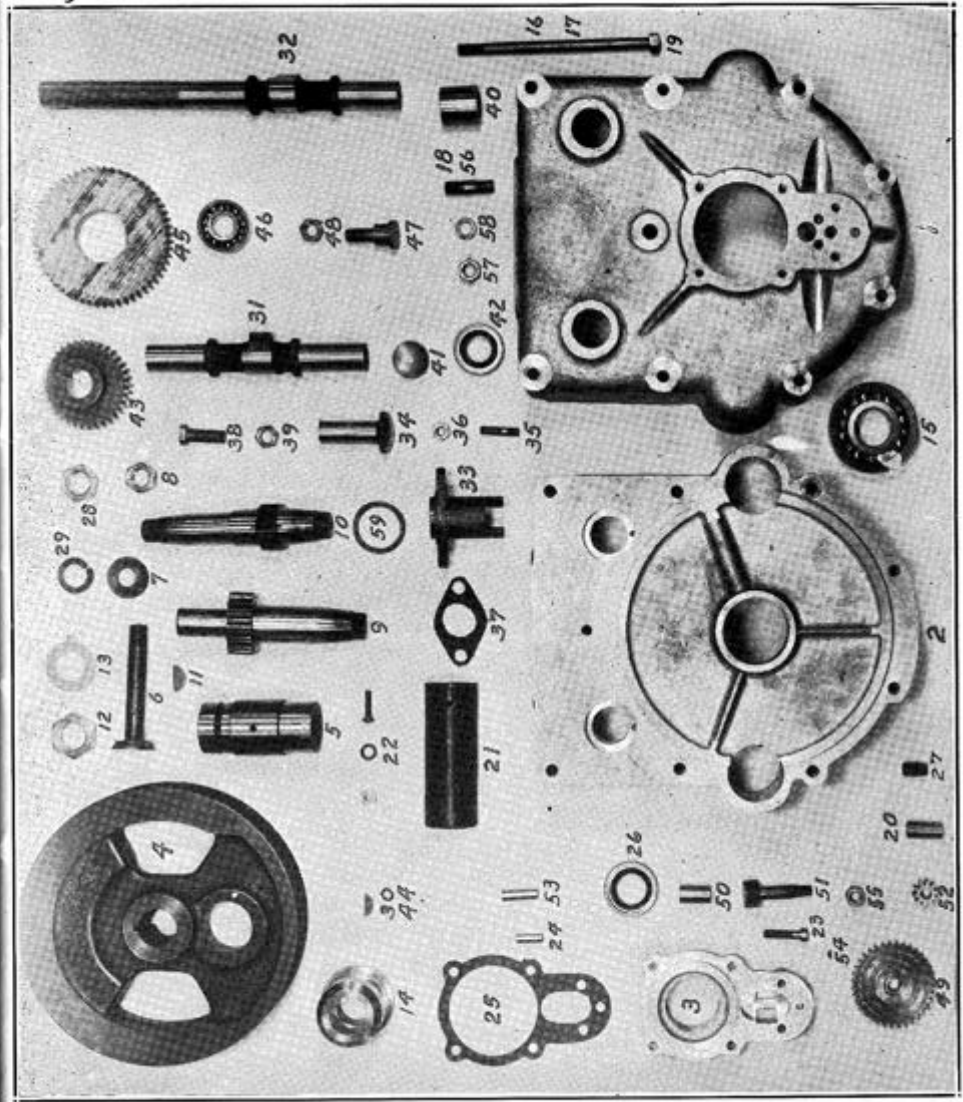


PLATE 2—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
25	L-125	Bearing cap gasket	.02	44	503-K	Cam shaft gear key	.02
26	L-126	Bearing cap oil seal	.45	45	L-415	Idle gear	1.80
27	701-P	Crank case drain plug	.03	46	L-416	Idle gear bearing	1.23
28	218-N	Fan drive pulley nut	.03	429		Tuning idler & bearing assem.	3.25
29	309-W	Fan drive pulley nut washer	.02	47	L-417	Bearing stud	.24
30	504-K	Fan drive pulley key	.02	48	221-N	Bearing stud nut	.01
31	L-401	Intake cam shaft	1.32	49	L-419	Oil pump drive gear	1.00
32	L-402	Exhaust cam shaft	1.36	50	L-420	Oil pump bearing bushing	.21
33	L-403	Valve plunger guide	1.08	51	L-421	Oil pump master gear	1.60
34	L-404	Valve plunger	.64	52	L-422	Oil pump idle gear	.64
35	L-405	Plunger guide stud	.08	53	L-423	Idle gear stud	.08
36	202-N	Plunger guide stud nut	.02	54		Master gear key	.01
37	L-407	Plunger guide gasket	.03	55	215-N	Drive gear nut	.01
38	L-408	Tappett screws	.09			Oil pump, complete	4.61
39	L-409	Tappett lock nut	.06	56	L-303	Cylinder stud bolt	.04
40	L-410	Cam shaft bearing bushing	.18	57	206-N	Cylinder stud bolt nut	.02
41	L-411	Extension plug	.06	58	305-W	Lock washer	.01
42	L-412	Cam shaft oil seal	.39	59	L-319	Sleeve gasket	.03
43	L-413	Cam shaft gear	.84				


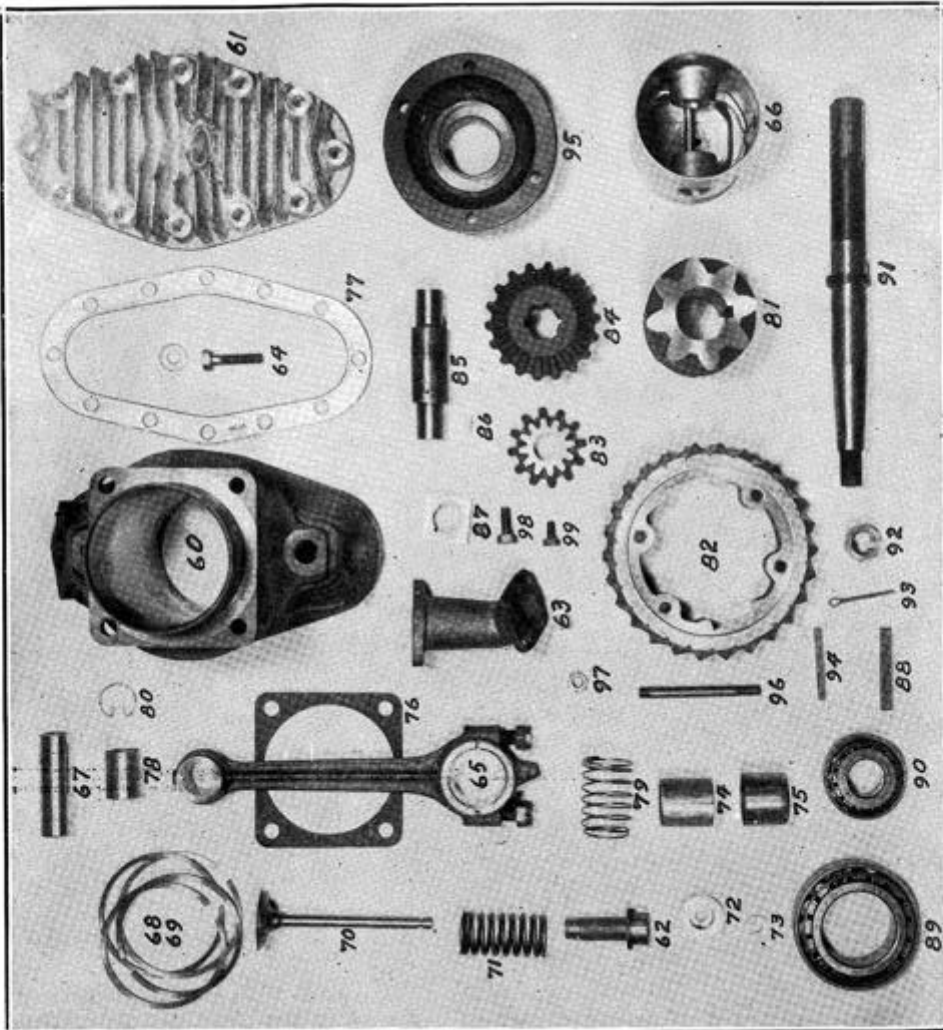


PLATE 3—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
60	5733	Cylinder	\$15.32	81	L-601	Worm	8.10
61	5734	Cylinder head	5.44	82	L-602	Worm gear	16.80
62	5737	Valve guide	.40	83	L-603	Bevel pinion	2.19
63	L-301	Manifold, intake & exhaust—Schebler carb.	1.08	84	L-604	Bevel gear	3.72
	L-301	Manifold, exhaust—Zenith carb.	1.08	85	L-605	Pinion pin	.64
	L-301-A	Manifold, intake—Zenith carb.	1.08	86	501-K	Pinion pin key	.01
64	401-W	Cylinder head washer	.04	87	L-607	Driving block	.68
64	154-S	Cylinder head bolt	.04	87	L-607-K	Driving block (with key)	.75
65	L-306	Connecting rod	2.25	88	L-608	Worm key	.04
66	5762	Piston	2.67	89	L-609	Differential bearing	2.58
67	5763	Piston pin	.50	90	L-610	Axle bearing	1.53
68	5757	Compression ring	.25	91	L-611	Axle	2.04
69	5758	Oil ring	.25	92	L-612	Axle nut	.06
70	L-311	Valve	.54	93	L-613	Axle nut cotter	.03
71	L-312	Valve spring	.09	94	L-615	Hub key	.04
72	5741	Valve spring cap	.18	94	L-616	Wheel, complete	10.00
73	5742	Valve spring cap key	.03	95	L-617	Hub cap	.20
74	L-315	Upper spring sleeve	.16	95	L-205	Differential housing	1.60
75	L-316	Lower spring sleeve	.16	96	L-206	Differential housing bolt	.04
76	L-317	Cylinder bottom gasket	.03	97	204-N	Nut	.04
77	5735	Cylinder head gasket	.45	98	164-S	Carburetor bolt (Schebler)	.04
78	5764	Piston pin bushing	.24	99	164-S	Manifold bolt	.04
79	L-318	Spring sleeve	.12		116-S	Carburetor bolt (Stromberg)	.04
80		Piston pin ock	.01			Cylinder assembly, complete	20.11
						Set of gaskets, complete	.78

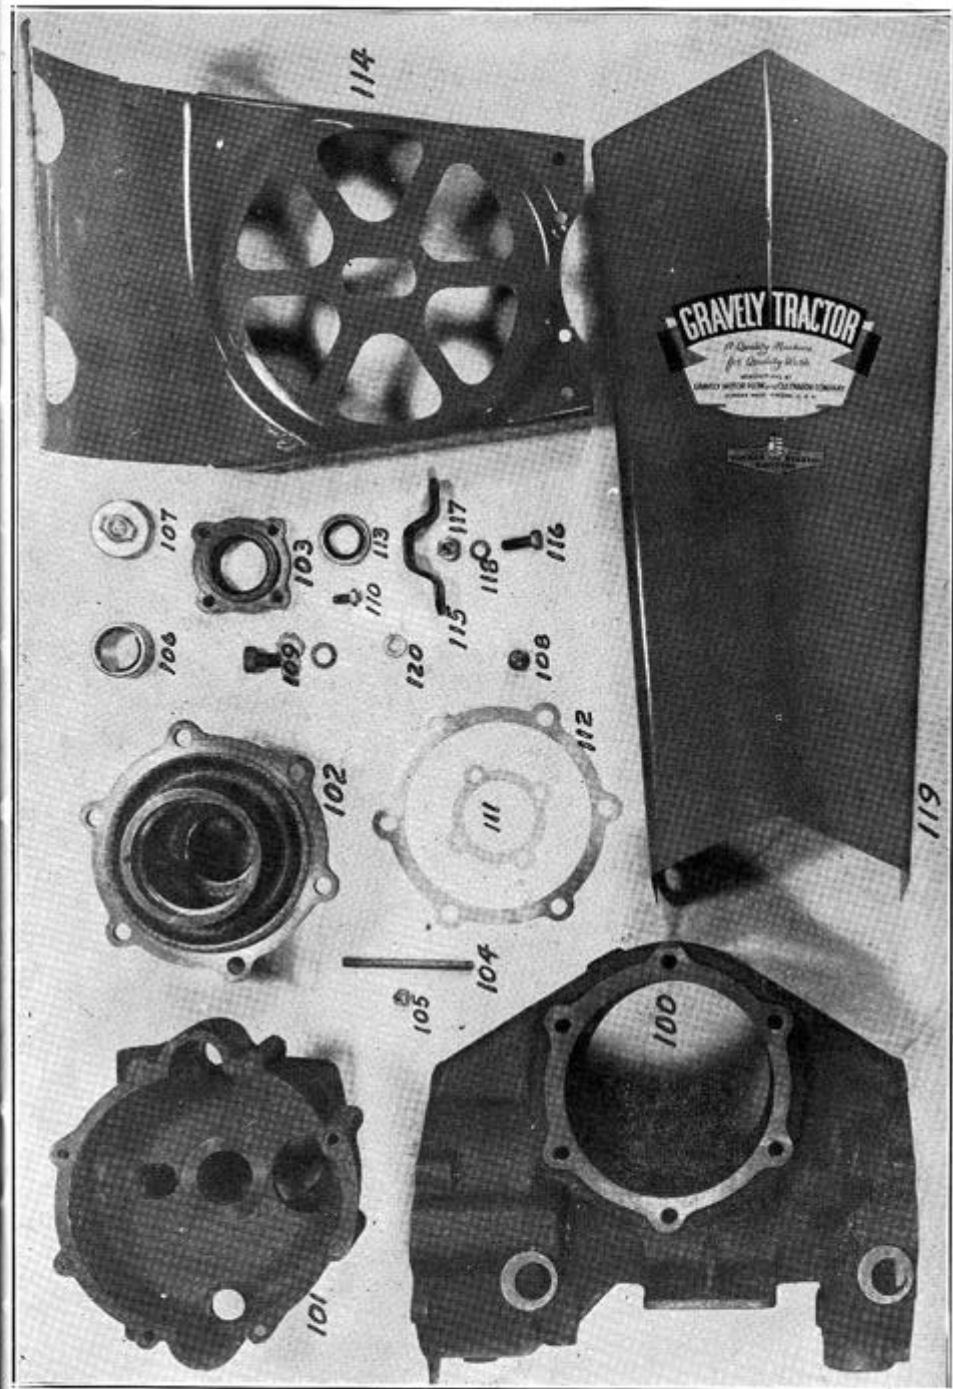

See page 14 for parts price list on this plate.


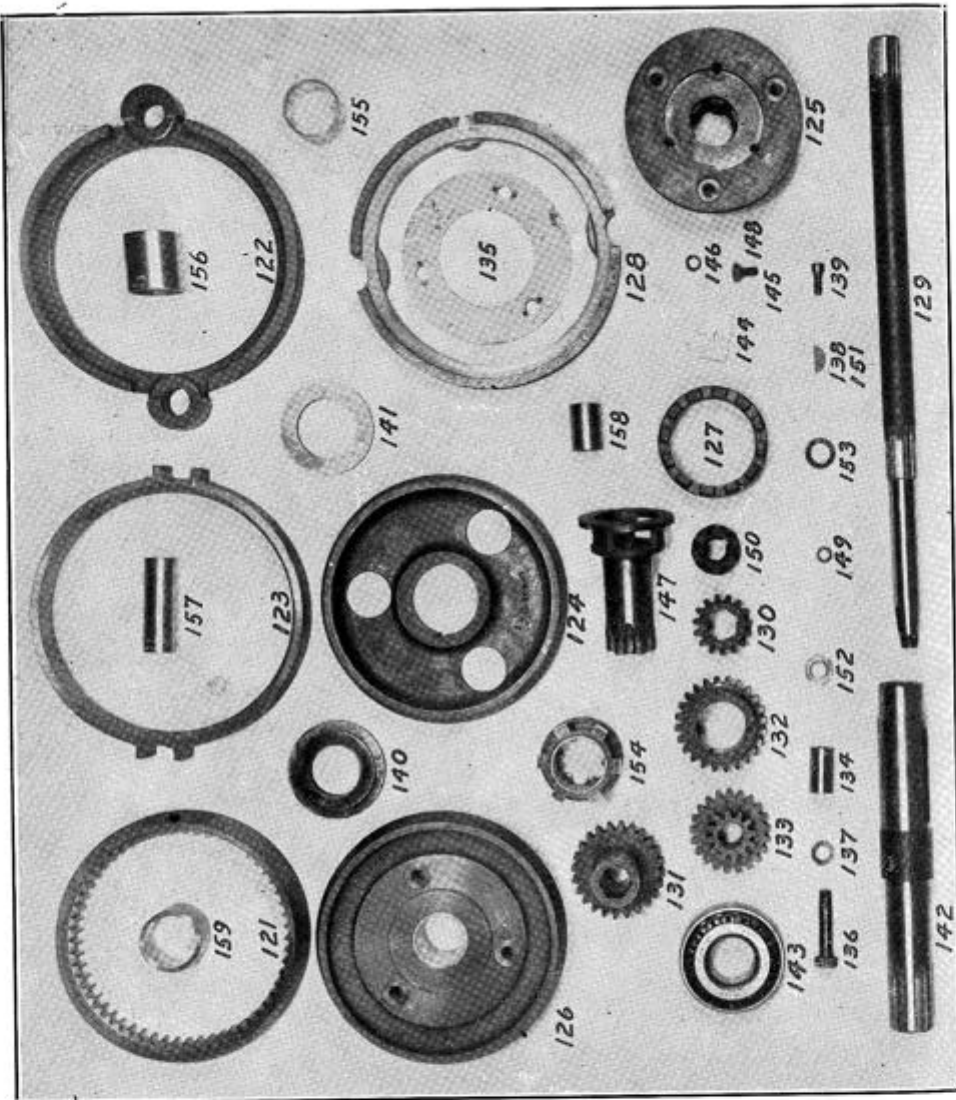


PLATE 5—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
121	L-501	Internal gear.....	\$2.55	141	L-520	Front thrust plate.....	.44
122	L-502	Rear spacer.....	3.12	142	L-521	Worm shaft.....	2.08
123	L-503	Clutch cup.....	2.08	143	L-522	Worm shaft bearing.....	1.80
124	L-504	Clutch cone.(37 Model only).....	2.32	144	L-523	Adjusting nut lock.....	.04
125	L-505	Front pin plate.....	2.46	145	L-524	Lock screw.....	.02
126	L-506	Rear pin plate.....	2.68	146	305-W	Lock screw lock washer.....	.01
127	L-507	Bearing adjusting nut.....	1.00	147	L-525	Reverse dog.(37 Model).....	3.08
128	L-508	Gear cup.....	2.24	148	L-526	Reverse dog bolt.(37 Model).....	.02
129	L-509	Pinion shaft.(37 Model).....	3.30	149	305-W	Reverse dog washer.(37 Model).....	.01
130	L-510	Sun pinion.....	1.16	150	L-527	Forward dog.(37 Model).....	1.02
131	L-511	Sun gear.....	2.04	151	504-K	Forward dog key.(37 Model).....	.02
132	L-512	Reverse sun gear.(37 Model).....	2.12	152	210-N	Forward dog nut.(37 Model).....	.02
133	L-513	Orbit gear.....	2.04	153	305-W	Forward dog le. wash.(37 Model).....	.02
134	L-514	Orbit gear pin.....	.15	154	L-530	Clutch dog.(37 Model).....	2.04
135	L-515	Pin spacer.....	.20	155	L-531	Clutch dog bearing.(37 Model).....	.36
136	L-516	Spacer bolt.....	.12	156	L-532	Quill bearing.....	.39
137	305-W	Spacer lock washer.....	.01	157	L-533	Pinion shf. bear. bush.(37 Model).....	.36
138	504-K	Clutch cone key.(37 Model).....	.01	158	L-534	Sun gear bushing.....	.24
139	L-518	Gear cap screw.....	.02	159	L-535	Rear pin plate bushing.....	.36
140	L-519	Rear thrust plate.....	.44				

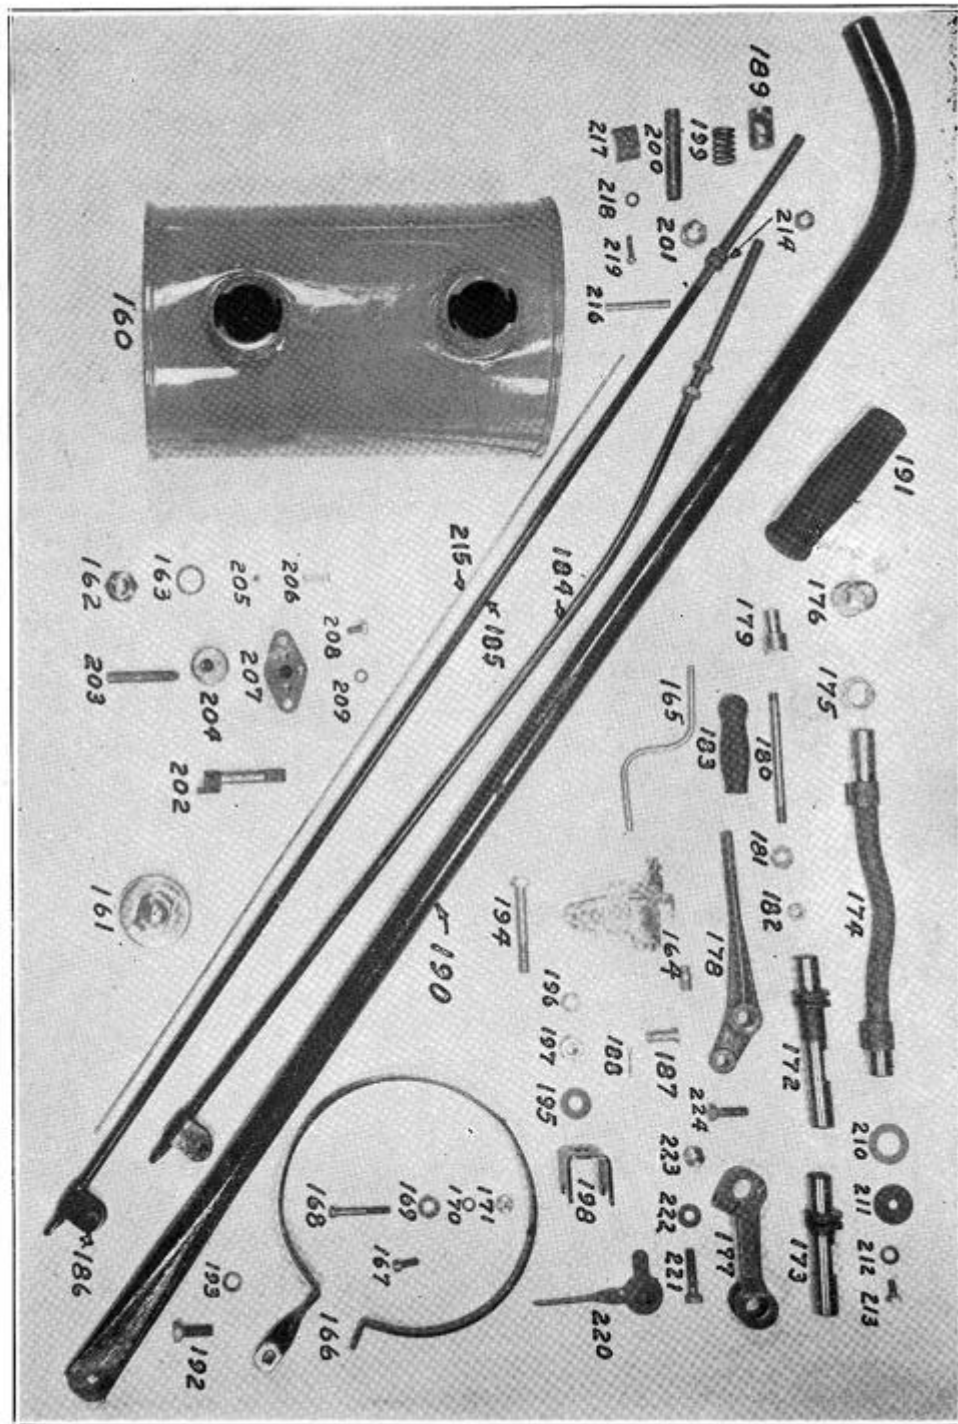

See page 14 for parts price list on this plate.

PLATE 4—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
100	L-201	Chassis casting	\$24.56	109	L-223	Axle housing bolt	.03
101	L-202	Advance casting	6.68	110	L-208	Bearing cap bolt	.02
	L-202-A	Baffle plate	.72	111	L-219	Bearing cap shim set	.36
102	L-203	Axle housing	7.76	112	L-220	Axle housing shim set	.09
103	L-204	Bearing cap	.72	113	L-221	Bearing cap oil seal	.45
104	L-207	Advance casting bolt	.04	114	L-222	Fan housing (37 Model)	2.88
105	204-N	Housing nut	.02		L-223	Fan housing rivets	.30
	L-209	Chassis front gasket	.06	115	L-224	Fan housing bracket	.12
	L-210	Chassis rear gasket	.06	116	L-225	Fan housing bolts	.05
106	L-211	Chassis oil filter neck	.03	117	205-N	Fan housing bolts nut	.04
107	L-212	Chassis oil filter cap	.03	118	305-W	Fan housing bl. nt. lc. washer	.01
108	705-P	Chassis drain plug	.02	119	L-820	Hood	.92
	L-215	Breather tube	.02	120	L-821	Hood spacer washer	.04

PLATE 6—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
160	L-701	Tank	\$4.95	192	111-S	Driving handle front bolt	.01
161	2505	Filler cap	.30	193	305-W	Front bolt lock washer	.01
	2504	Filler flange	.50	194	131-S	Driving handle rear bolt	.04
162	L-704	Outlet connection	.33	195	403-W	Rear bolt washer	.01
163	1814	Outlet gasket	.01	196	305-W	Rear bolt lock washer	.01
164	L-705	Gas strainer	.87	197	205-N	Rear bolt nut	.04
165	L-706	Gas tube—Carburetor	.06	198	L-728	Driving handle bracket	.08
	L-707	Tube connector	.06	199	L-729	Clutch spring	.30
166	5164	Tank band	.24	200	L-730	Clutch spring sleeve	.20
167	107-S	Tank band bolt, short	.03	201	210-N	Clutch spring sleeve nut	.02
168	149-S	Tank band bolt, long	.06	202	L-731	Shipper shaft (37 Model)	.76
169	401-W	Tank band bolt washer	.01	203	L-732	Shipper shaft lever	.08
170	303-W	Tank band bolt lock washer	.01	204	L-733	Locator body	.44
171	201-N	Tank band bolt nut	.02	205	1809	Locator ball	.03
172	L-710	Clutch slide rod, long	1.28	206	L-815-C	Locator spring (.025")	.09
173	L-711	Clutch slide rod, short	.88	207	L-734	Shipper shaft guide	.72
174	L-712	Clutch actuating shaft	1.88	208	164-S	Shipper shaft guide bolt	.02
175	L-713	Actuating shaft bushing	.15	209	303-W	Shipper shf. gun. bit. lc. washer	.01
176	L-714	Slide rod bushing	.32	210	L-735	Clutch act. shaft oil seal	.03
177	L-715	Actuating shaft lever	.84	211	L-736	Oil seal washer	.03
178	L-716	Clutch hand lever	.52	212	303-W	Act. shaft lock washer	.01
179	L-717	Hand lever pilot	.20	213	165-S	Act. shaft sec. screw	.02
180	L-718	Hand lever pilot bolt	.08	214	220-N	Clutch adj. nut	.01
181	401-W	Hand lever pilot bolt washer	.01	215	L-737	Throttle wire	.06
182	204-N	Hand lever pilot bolt nut	.02	216	L-738	Throttle wire guide	.03
183	5167	Hand lever grip	.09	217	L-739	Throttle guide clamp washer	.06
184	L-720-S	Clutch rod, short	.52	218	301-W	Guide clamp lock washer	.01
185	L-720-L	Clutch rod, long	.52	219	102-S	Guide clamp sec. screw	.02
186	L-721	Clutch rod clevis	.12	220	L-740	Throttle lever	.03
187	L-722	Clutch rod clevis pin	.12	L-741	Throttle lever hub	.06	
188	602-C	Clevis cotter	.01	221	154-S	Throttle lever pivot bolt	.03
189	L-723	Clutch rod pivot	.20	222	401-W	Pivot bolt washer	.01
190	L-724	Driving handle (R&L)	1.36	223	214-N	Pivot bolt nut	.03
191	5125	Driving handle grip	.54	224	109-S	Act. lever clamp bolt	.03

PLATE 7—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
225	5745	Fan drive pulley	\$ 4.20	238	L-806	Carburetor—Stromberg	10.50
226	5784	Drive pulley pin	.04		L-806-A	Carburetor—Schuler	10.50
227	L-802	Fan pulley	.92		L-806-Z	Carburetor—Zenith	8.50
		Fan assembly, complete	1.60	239	L-707	Gas tube connection	.06
229	5137	Fan shaft	.36	241	L-808	Magneto	23.25
230	206-N	Fan securing nut	.04	242	L-806	Magneto coupling	2.25
231	305-W	Fan nut lock washer	.01		L-810	Magneto shaft extension	.32
232	204-N	Fan pulley jam nut	.02	243	1709	Spark plug	.60
233	5139	Fan ball bearings	1.17	244	L-816	Muffler	1.14
234	5165	Fan ball spacer	.04		L-816-A	Muffler elbow	.39
235	5133	Fan ball race retainer	.56	245	L-817	Air filter	1.50
236	5134	Fan bearing lock nut	.21	246	L-818	Air filter elbow	1.72
237	L-830	Fan bearing washer	.05	247	L-819	Air filter manifold (37 Model)	.56
		Fan & bearing assemb., comp.	5.43	248	L-812	Oil filter	2.46

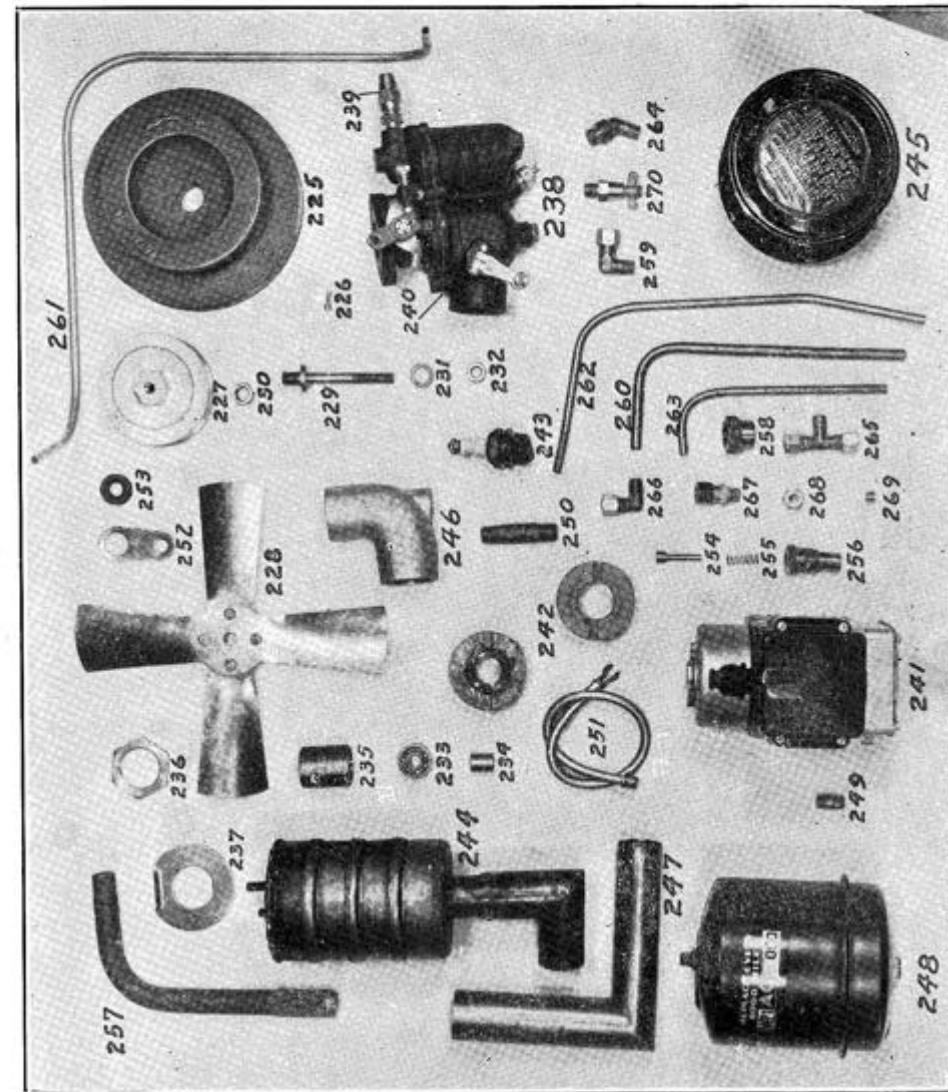


PLATE 7—PRICE LIST—Continued

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
249	L-814-E	Oil filter nipple	\$.06	261	L-813-B	Pump discharge line	.06
251	1731	Magneto cable, complete	.30	262	L-813-C	Motor supply line	.06
252	L-826	Cable bracket	.09	263	L-813-D	Filter discharge line	.06
253	L-827	Rubber grommet	.03	264	1723	Connector on engine	.20
254	L-815-B	Relief valve	.33	265	L-814-C	Discharge line tee	.21
255	L-815-D	Relief valve spring	.06	266	L-814-D	Motor supply elbow	.12
256	L-815-A	Relief valve body	.33	267	L-814-A	Pump supply connection	.12
257	L-822	Oil strainer body	.48	270	L-214	Oil level try cock	.18
258	L-823	Oil strainer nut	.30		L-739		
259	L-814-F	Pump supply elbow	.18		A&B	Choice cable, complete	.20
260	L-813-A	Pump supply line	.06				



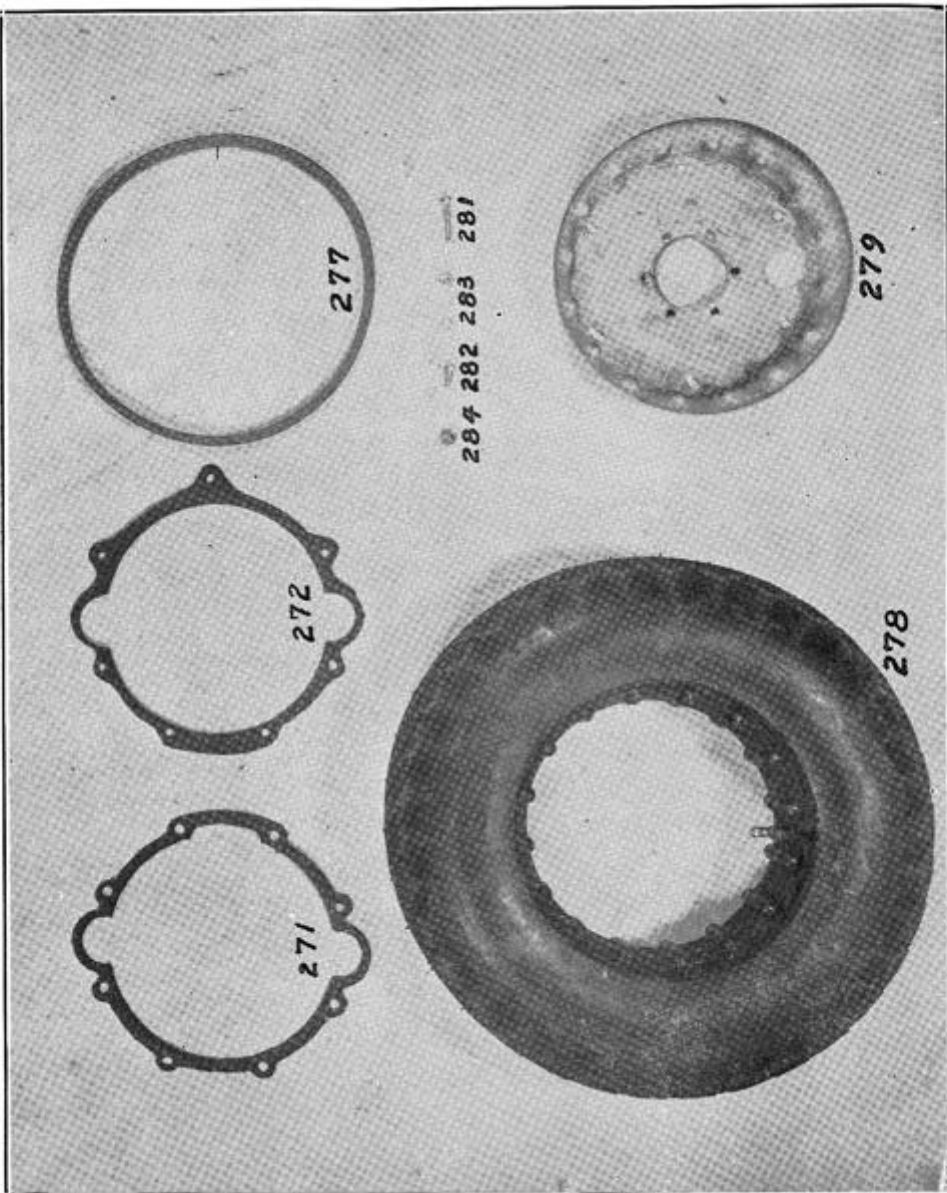


PLATE 8—PRICE LIST

Photo No.	Part No.	Name	Price
271	L-209	Chassis front gasket.....	\$.06
272	L-210	Chassis rear gasket.....	.06
	L-407-A	Plunger guide gasket.....	.03
	L-407-B	Manifold gasket, upper.....	.03
	L-807-A	Carburetor gasket.....	.03
	L-807-B	Muffler gasket.....	.03
277	5163	Fan belt.....	.75
278	16"	Tire.....	8.00
279		Wheel, inner section.....	.90
280		Wheel, outer section.....	.90
281		Wheel bolt, long.....	.01
282		Wheel bolt, short.....	.01
283		Wheel bolt lock washer.....	.01
284		Wheel bolt nut.....	.01
	L-616	Wheel, complete.....	10.00

PLATE 9—PRICE LIST

Photo No.	Part No.	Name	Price
400	L-701	Tank.....	4.95
401	L-222	Fan housing.....	2.88
402	L-202-A	Baffle plate.....	.72
403	L-536	Pin plate quill.....	2.50
404	L-546	Pinion shaft bearing.....	.20
405	L-539	Front pin spacer.....	1.45
406	L-540	Reverse idler.....	.96
407	L-541	Reverse idler bushing.....	.10
408	L-542	Reverse idler bolt.....	.10
409	L-543	Pinion shaft.....	2.50
410	L-544	Clutch dog.....	2.80
411	L-545	Shipper shaft.....	1.12
412	L-828	Filter bracket.....	.15
413	165-S	Filter bracket bolt.....	.02
414	303-W	Filter bracket washer.....	.01

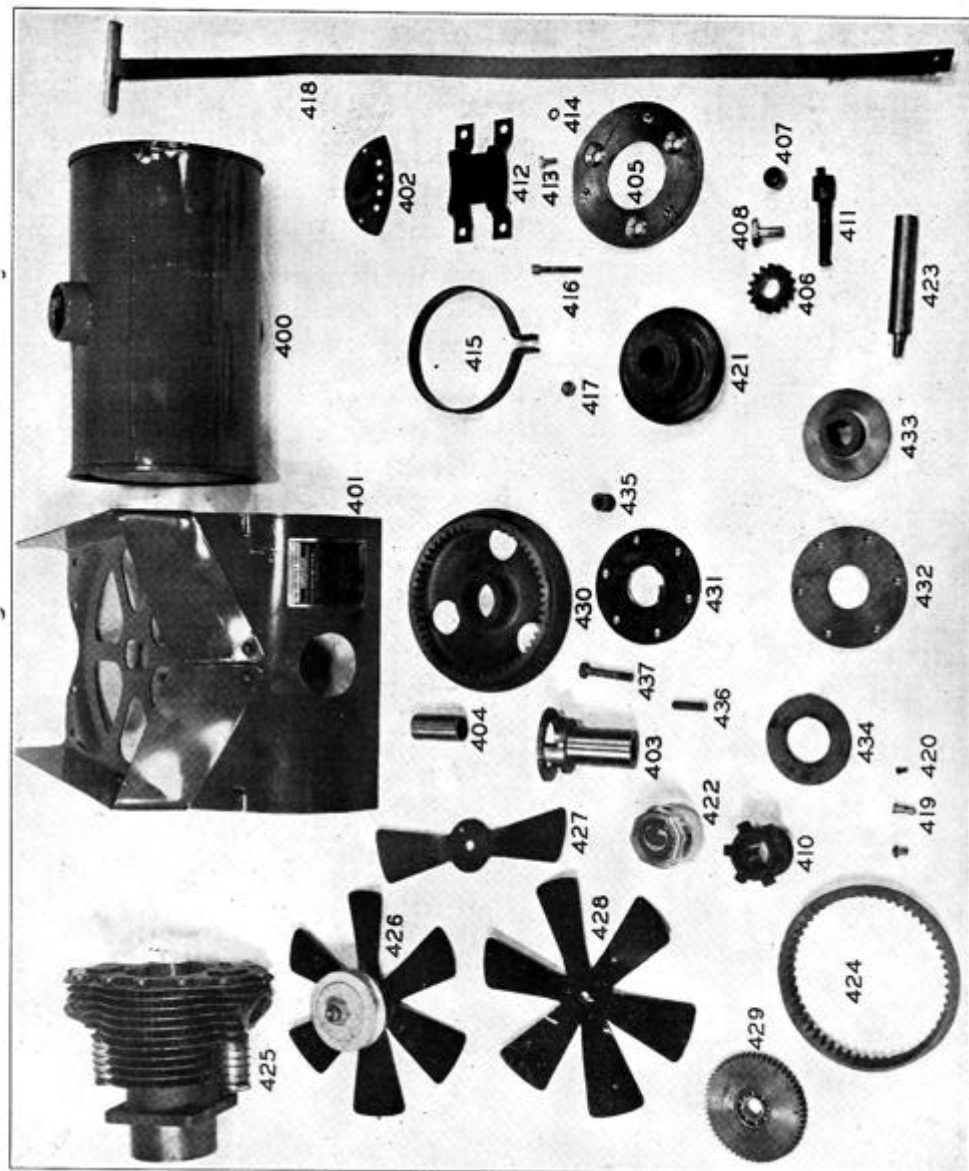


PLATE 9—PRICE LIST—Continued

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
415	L-829	Oil filter mounting bands.....	\$.06	433	SC-33	Drive plate.....	.95
416	149-S	Filter band bolts.....	.06	434	SC-34	Friction washer.....	.16
417	303-W	Filter band washer.....	.01	435	SC-35	Spring.....	.06
418	2801-L	Starting strap.....	.75	436	SC-36	Drive stud.....	.08
419	2605	Carburetor lever pin.....	.12	437	167-S	Spring bolt.....	.04
421	L-614	Wheel hub.....	1.72	437	204-N	Spring bolt nut.....	.02
422	L-617	Hub cap.....	.20	437	304-W	Spring bolt nut washer.....	.01
423	L-810	Magneto shaft extension.....	.32			Safety clutch, complete.....	6.30
425		Cylinder assembly, complete.....	20.11				
426		Fan & bearing assmb., comp.....	5.43				
427	L-805	Fan blades.....	.48				
428		Blade assembly, complete.....	1.60				
429		Timing idler & bearing assmbly.....	3.25				
430	L-537&8	Reverse Cone assembly.....	5.76				
431	SC-30	Dog plate.....	3.90	814-B		Discharge line connection.....	.09
432	SC-32	Back plate.....	.50	SC-31		Dog plate.....	1.20
				5135		Fan spider.....	.64
				5136		Fan blade.....	.52

PARTS NOT SHOWN BUT USED ON 37 MODEL ONLY

## ORDERING PARTS

This Parts List is issued for your convenience in ordering parts. Most all the parts are illustrated in the various plates and then listed. In order to save delay and correspondence, try to give full instructions.

## HOW TO ORDER

Be sure that you write plainly and legibly. Do not write on any other subject in the same letter. Select the part numbers by referring to both the plates and parts list, comparing parts with illustrations. **ORDER BY EITHER PART OR PHOTO NUMBER STATING WHICH BUT BE SURE AND GIVE THE SERIAL NUMBER OF THE ENGINE AS WELL AS THE PARTICULAR ATTACHMENT THAT YOU ARE ORDERING FOR.**

## SHIPPING INSTRUCTIONS


Always state on order whether shipment is to be made by express, freight or parcel post.

## REMITTANCE

Remit by post office or express money order. Stamps will be accepted for orders less than One Dollar (\$1.00) only. Remittance must include postage charges if to be shipped by mail, and also include ten cents (\$0.10) to cover insurance. Any excess remittance will be returned. **MINIMUM CHARGE FOR ANY ORDER IS 25 CENTS. UNLESS REMITTANCE IS SENT WITH ORDER, SHIPMENT WILL BE MADE C. O. D. FOR THE FULL AMOUNT.**

## PRICES

Prices quoted herein are subject to change without notice. In case of change, orders will be filled at current prices. All parts sold F. O. B. factory.

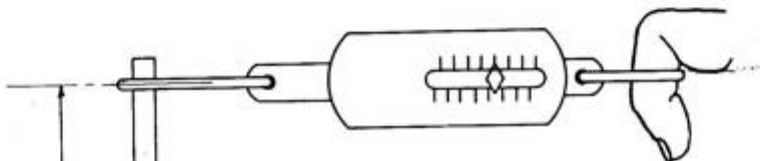
INSTRUCTIONS FOR ADJUSTING SAFETY SLIP CLUTCH

All L Model Attachments are equipped with safety slip clutches and it is of the utmost importance that these clutches be properly adjusted. If the clutch is too loose it will not efficiently drive the attachment. If too tight it may prove disastrous to the transmission of the tractor. Due to the high velocity and weight of the fly wheels in the engine it would be impractical to build a transmission to stand the shock when getting an obstruction in the attachment.

We have taken recourse to a safety slip clutch to absorb all shocks that the attachments are subject to. The illustration shows the most practical method of adjustment. Place a flat bar in the driving shaft, use a pair of spring scales on the bar 12" from the center of clutch, adjust spring tension evenly so that it takes 30 to 35 lbs., to make the clutch slip.

This will transmit all of the engine power and still protect tractor and attachments from shock stress.

GRAVELLY MOTOR PLOW & CULTIVATOR CO.  
DUMFRIES, VY. VA.

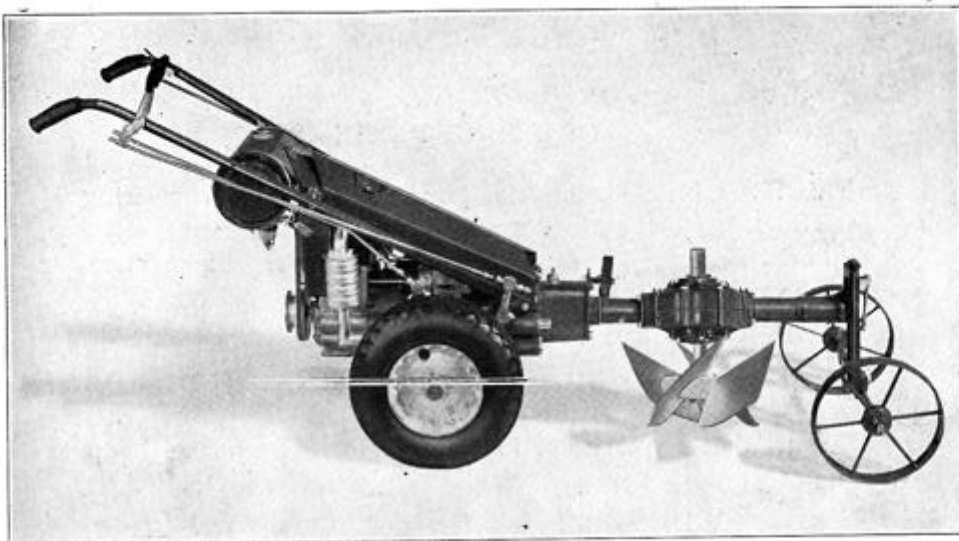

### ATTACHING THE ROTARY PLOW

This Power Attachment goes in front and like is shown in the above photo. In the instructions to follow the photo numbers all refer to the Plate No. 11 as found on the opposite page.

**TO GOVERN WIDTH OF CUT:** Slide the Round Steel Depth Wheel Axle (15) to which Depth Wheels (28) are attached along Castings (5 & 6) Wheel Bracket and Axle Clamp. Notice that one Depth Wheel runs in the cut furrow. Naturally the extreme end means the least possible width, and vice versa.

Another feature that controls width is the angle of the Rotor Axle (14) to which the Rotor Spade Cutters (19) are attached. If this is straight up and down naturally the width will be the least. But, in changing the angle be sure and get it pointed in the right direction and as shown on the large photo of this plow attached to the Tractor. If you get this on the wrong side of the plow unit proper it will make for side drag. Photos are sometimes confusing as to sense of direction. Please watch that point.

### DEPTH OF CUT

On Rotor Axle (14) you will find different holes for the Cotters (50). The farther down towards the ground the deeper the cut. But, the adjustment you will want to use most is the Wheel Bracket Clamp Screw (17) and the Wheel Bracket Clamp Handle (18). By loosening the handle you will find this will slide up and down on the Wheel Bracket (5). This way you can completely raise the Spade Cutter out of the ground and for moving from the field, etc. Under some unusual conditions you may find that special cutters will help you get the type of work you want done.

When using the tractor with the rubber-tired wheels and this does not have quite enough traction and the speed is too fast (be sure and use it awhile before deciding on this) it is possible to remove the rubber wheels and insert instead the steel wheels which have a geared speed reduction. These have more weight which means more traction.

When you use the L GRAVELY with Sickle Mower you will swear here is the easiest machine to handle you ever worked. On the Rotary Plow at first you may say just the opposite. But, take our word that after you get familiar with it, and if you use the Plow the right way, it is just as easy to use as the mower. **DON'T FORGET THAT IS AN ABSOLUTE FACT.**


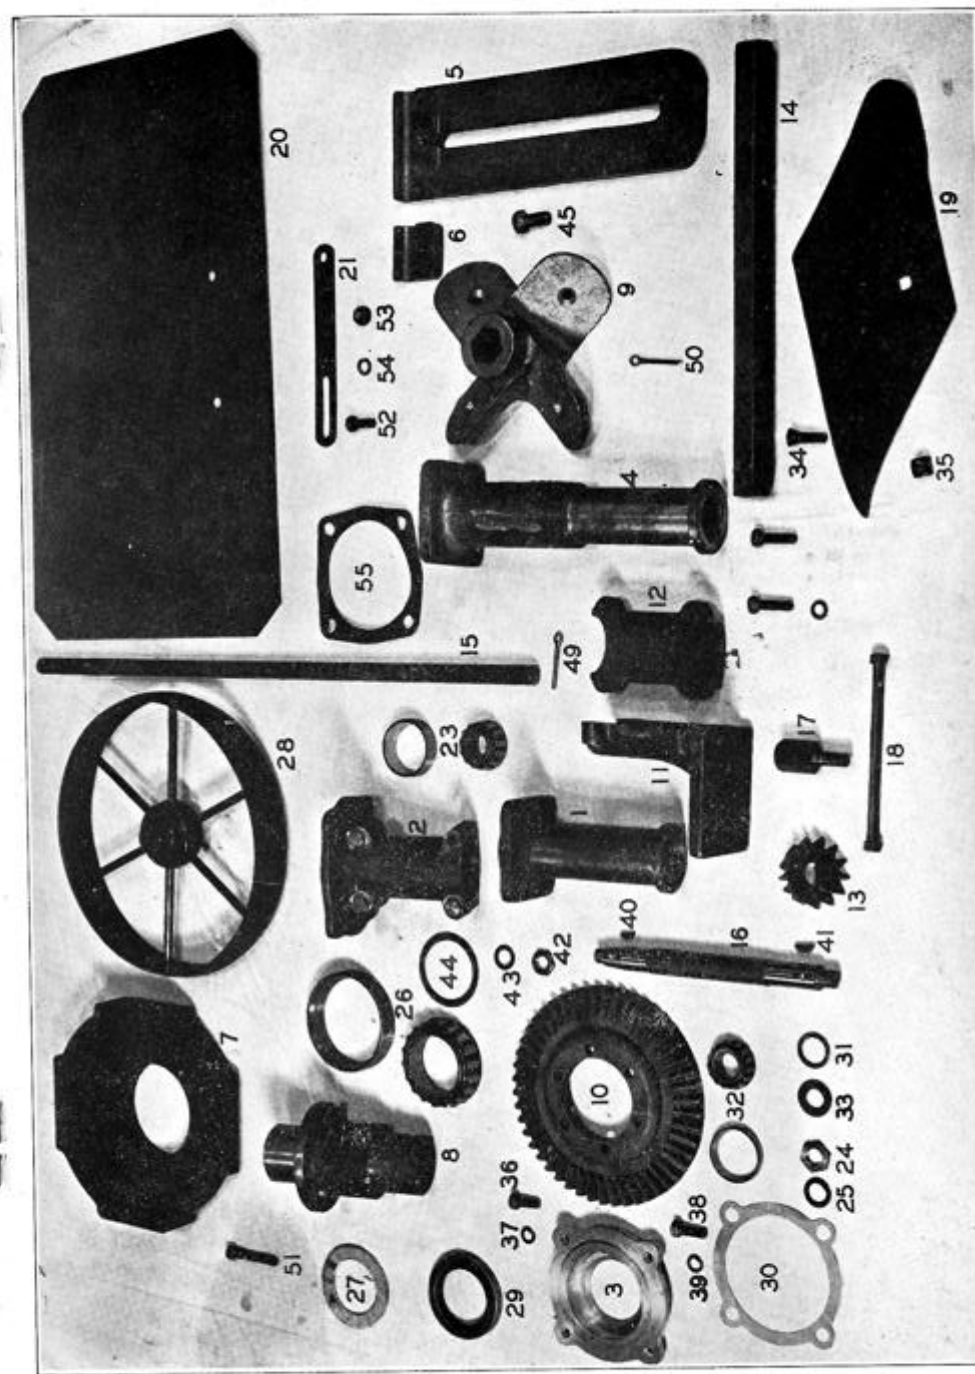


PLATE 11—PRICE LIST

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
<b>ROTARY PLOW PARTS PRICE LIST</b>				<b>SCREWS, NUTS, BOLTS, ETC.</b>			
1	M-101	Gear housing column	\$3.00	36	121-S	Bevel gear bolt	.06
2	M-102	Swivel bracket	2.50	37	305-W	Lock washer	.01
3	5308	Housing bearing cap	1.84	38	110-S	Bearing cap bolt	.05
4	5331	Gear housing extension	4.00	39	305-W	Lock washer	.01
5	5303	Wheel bracket	1.64	40	503-K	No. 6 woodruff key	.02
6	5304	Axle clamp	.45	41	504-K	No. 9 woodruff key	.02
7	5330	Upper gear housing	3.65	42	215-N	Safety clutch nut	.03
8	5330	Lower gear housing	3.44	43	304-W	Lock washer	.01
9	5306	Bevel gear hub	4.72	44	5317	Bearing shim—.005	.05
10	5312	Rotor spider hub	3.10			— .007	.08
11	5315	Bevel gear	2.44			— .020	.15
12	5326	Wheel bracket swivel	1.48	45	160-S	Axle clamp bolt	.03
13	5328	Wheel bracket cap	1.04	46	5325	Bracket clamp bolt	.90
14	5309	Bevel pinion	2.36	47	308-W	Lock washer	.01
15	5310	Rotor axle	1.40	48	112-S	Extension bolt	.05
16	M-308	Drive shaft	1.00	49	602-C	Axle cotter	.01
17	5325	Wheel bracket clamp screw	.50	50	603-C	Rotor shaft cotter	.01
18	5325-A	Wheel bracket clamp handle	.10	51	151-S	Gear housing bolt	.05
19	5322	Rotor spade cutter	1.00	52	121-S	Brace bolt	.06
20	5324	Dirt shield	.88	53	205-N	Brace nut	.04
21	2703	Dirt shield braces	.10	54	305-W	Brace lock washer	.01
22	3126	Column shims—.005	.06	55	5056	Mounting gasket	.08
		— .010	.09				
		— .020	.12				
23	3147	Pinion shaft bearing	1.45				
24	1304	Pinion shaft nut	.10				
25	5721	Pinion shaft lock washer	.10				
26	2208	Bevel gear hub bearings	5.84	A-301	Adjusting bracket	.30	
27	5003	Housing bearing cap felt	.12	A-302	Adjusting handle	.30	
28	5327	Depth wheels	2.04	172-S	Adjusting bolt	.07	
29	5318	Gear housing oil seals	1.08	410-W	Adjusting bolt washer	.01	
30	5317	Bearing adjusting shims—.005	.05	211-N	Adjusting bolt nut	.03	
		— .010	.12	3213	Adjusting spacer	.06	
		— .020	.21	151-S	Handle bolt	.05	
31	M-326	Pinion shims	.03	305-W	Handle bolt lock washer	.01	
32	3147	Pinion shaft bearing	1.45	205-N	Handle bolt nut	.04	
33	5413	Shims	.10	L-126	Drive shaft oil seal	.45	
34	1/2"x1-1/4"	#3 plow bolts	.05	3151	Drive shaft oil seal retainer	.06	
35	1/2"x1-1/4"	Plow bolt nuts	.01	219-N	Pinion shaft nut	.06	

The following parts, but recently developed, have no Photo No. and must be ordered by Part No. and Name.

A-301	Adjusting bracket	.30
A-302	Adjusting handle	.30
172-S	Adjusting bolt	.07
410-W	Adjusting bolt washer	.01
211-N	Adjusting bolt nut	.03
3213	Adjusting spacer	.06
151-S	Handle bolt	.05
305-W	Handle bolt lock washer	.01
205-N	Handle bolt nut	.04
L-126	Drive shaft oil seal	.45
3151	Drive shaft oil seal retainer	.06
219-N	Pinion shaft nut	.06

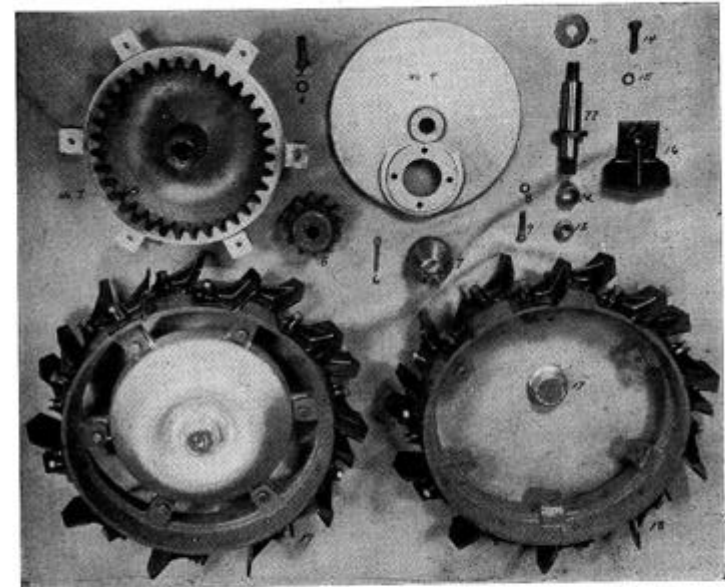

SPECIAL WHEELS WITH SLOW SPEED GEAR RATIO

INSTRUCTIONS FOR MOUNTING GEARED WHEEL ON STANDARD TRACTOR

To remove the Standard Wheels, take off the Hub Cap, Wheel, Nut and Cotter Pin. Screw on Knocker furnished with the Wheel set. Strike several blows with a light hammer until Wheel is loosened. After lifting off Wheel, remove the four bolts from Bearing Cap, leaving cap in place.

Remove Mounting Plate from Geared Wheel. Place mounting Plate over Bearing Cap and secure with four long bolts furnished. Be sure to use Lock Washers in these bolts. Mount Pinion (5) on Axle being sure to have Key, Nut and Cotter in place and securely tightened. Place the Wheel Assembly on the Mounting Plate by inserting the Auxiliary Axle into its opening and securing with Nut.


The Mounting Plate may be secured in any one of four positions. Position determines clearance, balance of tools, etc. We recommend both wheels turned down for cultivating. Where one wheel runs in the cut, as in Turn Plowing, we recommend that the left wheel be extended forward, the right wheel be extended downward. This tends to level the machine when in the plowing position. This machine may also be operated with a standard wheel on the high ground and a Geared Wheel in the cut, this combination giving more ground speed.

If your Tractor has Rubber-Tired Wheels and still you get NEARLY enough power and traction, we can furnish you with a set of chains for the Tires that will increase it some. Of course, this still is not as much as the Geared Steel Wheels. But in some cases this small extra is ample.

We again invite you to ask any questions that you might have in mind.


GEARED WHEELS FOR L TRACTORS

Photo No.	Part No.	Name of Part	No. Req.	Price Each	Photo No.	Part No.	Name of Part	No. Req.	Price Each
4	L-901	Mounting plate	2	\$ 3.20	6	606-C	Axle cotter key	2	.02
1	L-902	Spider gear	2	7.10	9	L-910	Mounting plate bolt	8	.10
18	L-903	15" Rim	2	8.80	2	111-S	Rim bolts	12	.05
5	L-904	Axle pinion	2	3.85	16	2206	Cleat	40	.25
11	L-905	Auxiliary axle	2	1.75	14	112-S	Cleat bolts	40	.05
10	L-906	Thrust washer	2	.25		L-913	Bearing spacer	2	.20
12	L-908	Wheel bearing	4	.68	17	L-617	Hub caps	2	.15
					3&15	305-W	Lock washer		.01
					8	304-W	Lock washer		.01
11	L-909	Bearing cap	2	.25	7	L-914	Wheel knockout	1	.30
13	219-N	Bearing nut	2	.06			Set complete wheels	2	\$40.00
13	222-N	Axle securing nut	4	.04					

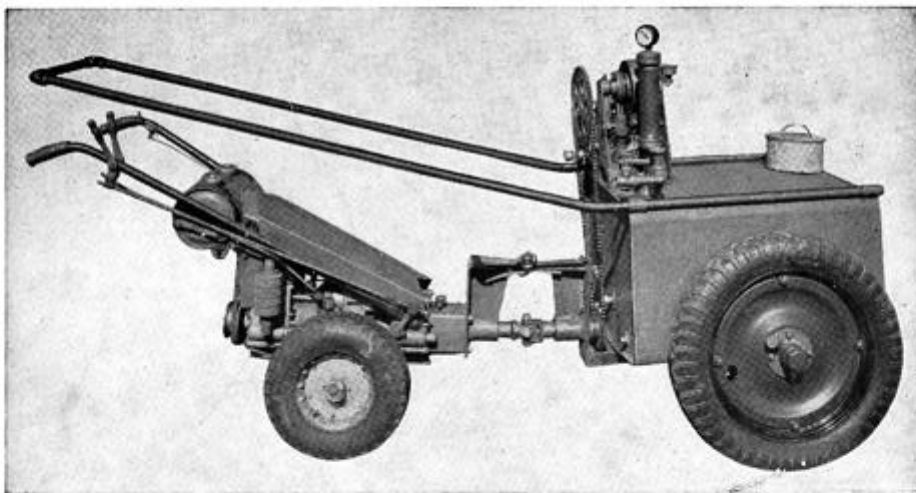

THE BEAN-GRAVELY ESTATE SPRAYER

Separate instructions available for operating Sprayer. This power attachment is fastened to the Tractor proper like all others on the GRAVELY and by means of the usual four studs.

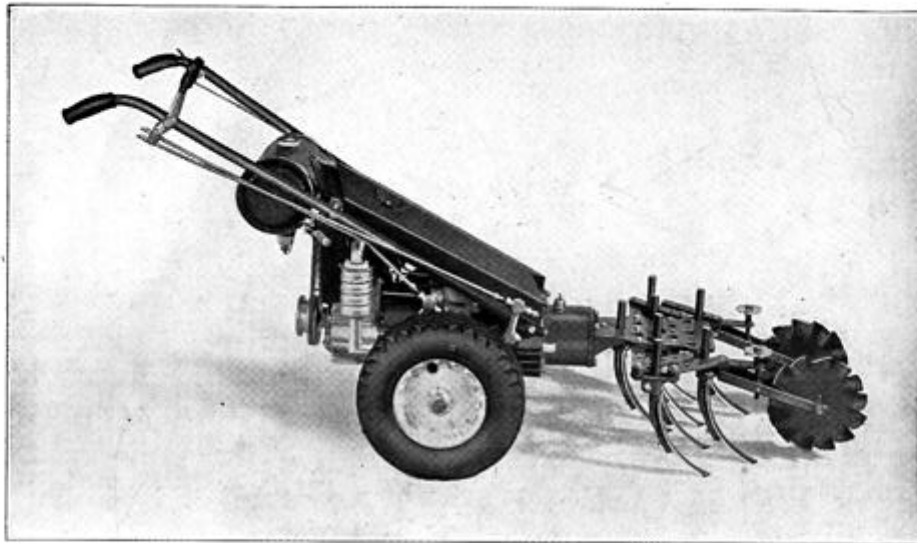

FRONT TOOL HOLDER

There are many and varied small cultivating tools that can be used on the ONE tool holder. We picture the 7 1-1/4" Cultivating Steels. This is self-explanatory. The steels themselves can be used in different formations, etc. It is generally more satisfactory to use 7 steels even if used in narrower widths.


In a very hard soil it sometimes helps to put a weight on the holder. On this same Tool Holder and with the same steel Shanks you attach such tools as Furrower, Sweeps, Hillers, etc.

See Plate 12 for illustration of parts.

PARTS PRICE LIST FOR "L" FRONT TOOL HOLDER

Photo No.	Parts No.	Description	No. Req.	Price Each
234		Depth adjusting wheel	2	\$ 5.00
235	2709	Wheel mounting bracket	2	1.50
236	2710	Plain shank holder, com	5	.50
238	2725	Shank clamp bolt	7	.15
239	2726	Shank clamp nut	7	.10
240	2715	Depth wheel complete with hub	2	.90
241	2716	Depth wheel hub	2	.30
242	2717	Depth wheel rivet	8	.01
243	2718	Depth wheel link	4	.30
244	2719	Depth wheel link spacer	4	.14
245	2724	Depth adjusting nut	2	.30
246	2720	Depth adjusting screw	2	.25
247	403-W	Depth adjusting sc. wash	2	.01
248	2721	Depth adjusting knob	2	.10
249	205-N	Knob lock nut	2	.04
250	1602	Depth screw friction sprg.	2	.16
252	2708	Parallel bar	8	.28
256	2712	Long tool shank	7	.40
	5055	Front tool holder frame	1	5.00
	5056	Front tool holder fr. gskt.	1	.08
255	112-S	Parallel bar extension bit	14	.05
	602-C	Cotter key	7	.01

Complete tool holder for "L" Model—front...\$12.00  
The following numbers appearing on Plate #12 are used on Model D Toolholders only: Photos #'s 237-251-257 to 268 inclusive.

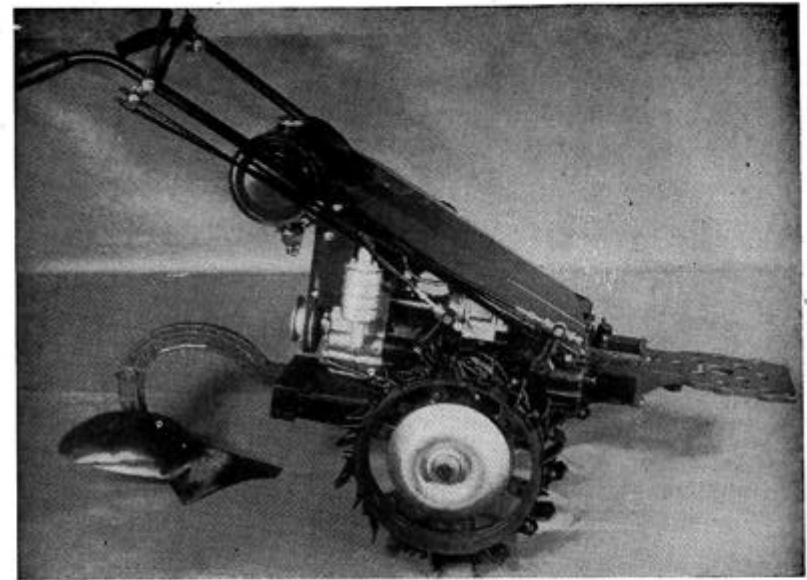

TURN PLOW

TOOL HOLDER

Parts of this same Hitch is used in attaching the rear tool holder; also Water Ballast Roller.

PARTS PRICE LIST FOR "L" REAR TOOL HOLDER

Photo (No.)	Parts No.	Description	No. Req.	Price Each
234		Depth adjusting wheel	2	\$ 5.00
235	2709	Wheel mounting bracket	2	1.50
236	2710	Plain shank holder, com	3	.50
238	2725	Shank clamp bolt	5	.15
239	2726	Shank clamp nut	5	.10
240	2715	Depth wheel complete with hub	2	.90
241	2716	Depth wheel hub	2	.30
242	2717	Depth wheel rivet	8	.01
243	2718	Depth wheel link	4	.30
244	2719	Depth whl. link spacer	4	.14
245	2724	Depth adjusting nut	2	.30
246	2720	Depth adjusting screw	2	.25
247	403-W	Depth adj. screw wash	2	.01
248	2721	Depth adjusting knob	2	.10
249	205-N	Depth adj. knob lo. nut	2	.04
250	1602	Depth screw friction spring	2	.16
252	2708	Parallel bar	8	.28
253	2707	Parallel bar clamp	2	.40
254	112-S	Parallel bar clamp bolt	2	.05
256	2712	Long tool shank	5	.40
	A-101	Rear toolholder or turn plow casting	1	5.00
	A-103	Rear tool holder hitch	1	2.50
	A-322	Tool frame pivot pin	1	.15
255	112-S	Parallel bar extension bolt	10	.05
	602-C	Cotter key	5	.01


Complete tool holder for "L" Model—rear...\$12.00

TURN PLOW PARTS

6 1/2"	Turn plow, less hitch	\$10.80
8"	Turn plow, less hitch	15.00
6 1/2"	Turn plow standard	1.25
6 1/2"	Turn plow point	1.25
8"	Turn plow point	2.00
A-101	Rear tool holder or turn plow casting	5.00
A-102	Turn plow beam	3.00
A-322	Tool holder pivot pin	.15
6 1/2"	Turn plow complete with rear hitch	12.00
8"	Turn plow complete with rear hitch	18.00

### ADJUSTABLE V TYPE SNOW FLOW

In many cases you will be able to move heavier snow by using a good heavy weight of around 100 pounds on this plow and to make it hold the ground as closely as possible. TO ADJUST: Rear and Front Cross Hitch have adjusting holes. Use inner holes for narrowest width and other for widest.

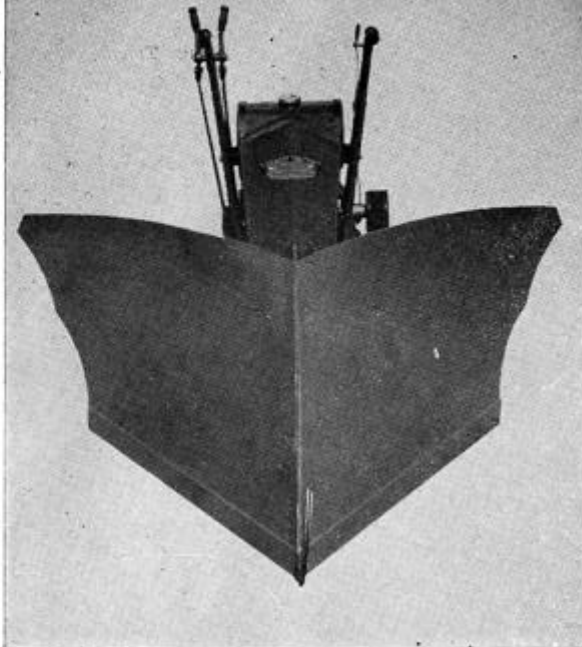

#### Parts for V Type Snow Plow

Part No.	Name of Part	No. Req.	Price Each
5900	Plow sides	2	\$10.00
5901	Hitch angle brace	4	.80
5903	Rear cross hitch	1	.90
5904	Front cross hitch	1	.45
5907	Loose pin butt hinge	12	.25
2717	Round head rivet	12	.01
147-S	Counter sink head bolt	8	.06
	Counter sink head rivets	18	.01
205-N	Hex nut	12	.04
305-W	Lock washer	12	.01
5908	Hinge tie rod	1	.25
5055	Toolholder frame	1	5.00
112-S	Hex head cap screw	2	.05
5909	Plow side blades	2	2.00
5911	D hitch cross arm	1	1.00
5912	D hitch swivel	1	1.20
162-S	Attaching bolts D & L	2	.10
5913	Spacer	1	.10
	Snow plow complete with hitch		\$40.00



#### Parts for Blade Type Snow Plow

Part No.	Name of Part	No. Req.	Price Each
A-119	Bracket	1	\$ 5.00
A-118	Swivel (female)	1	5.00
A-312	Retaining bolt	1	1.50
A-313	Blade	1	12.00
219-N	Retaining bolt nut	1	.06
111-S	Bracket bolt	4	.05
147-S	Blade bolt	4	.06
205-N	Blade Bolt nuts	4	.09
606-C	Cotter pin	3	.01
305-W	3/4" lock washer	8	.01
M-321	Swivel grease cup	1	.12
A-332	Kouckle pin	1	.90
A-333	Adjusting bolt	1	.30
208-N	Adjusting bolt nut	2	.09
A-334	Wearing strip	2	3.00
141-S	Wearing strip bolt	10	.05
214-N	Wearing strip nut	10	.03
	Skids	2	1.50
	Skid bolts	4	.05
147-S	Complete blade type snow plow		\$40.00

### REVERSIBLE BLADE TYPE SNOW FLOW

To reverse the Throw, swing the Plow over without changing a single bolt.


When using the GRAVELY for removing snow a set of Tire Chains will greatly increase the traction.

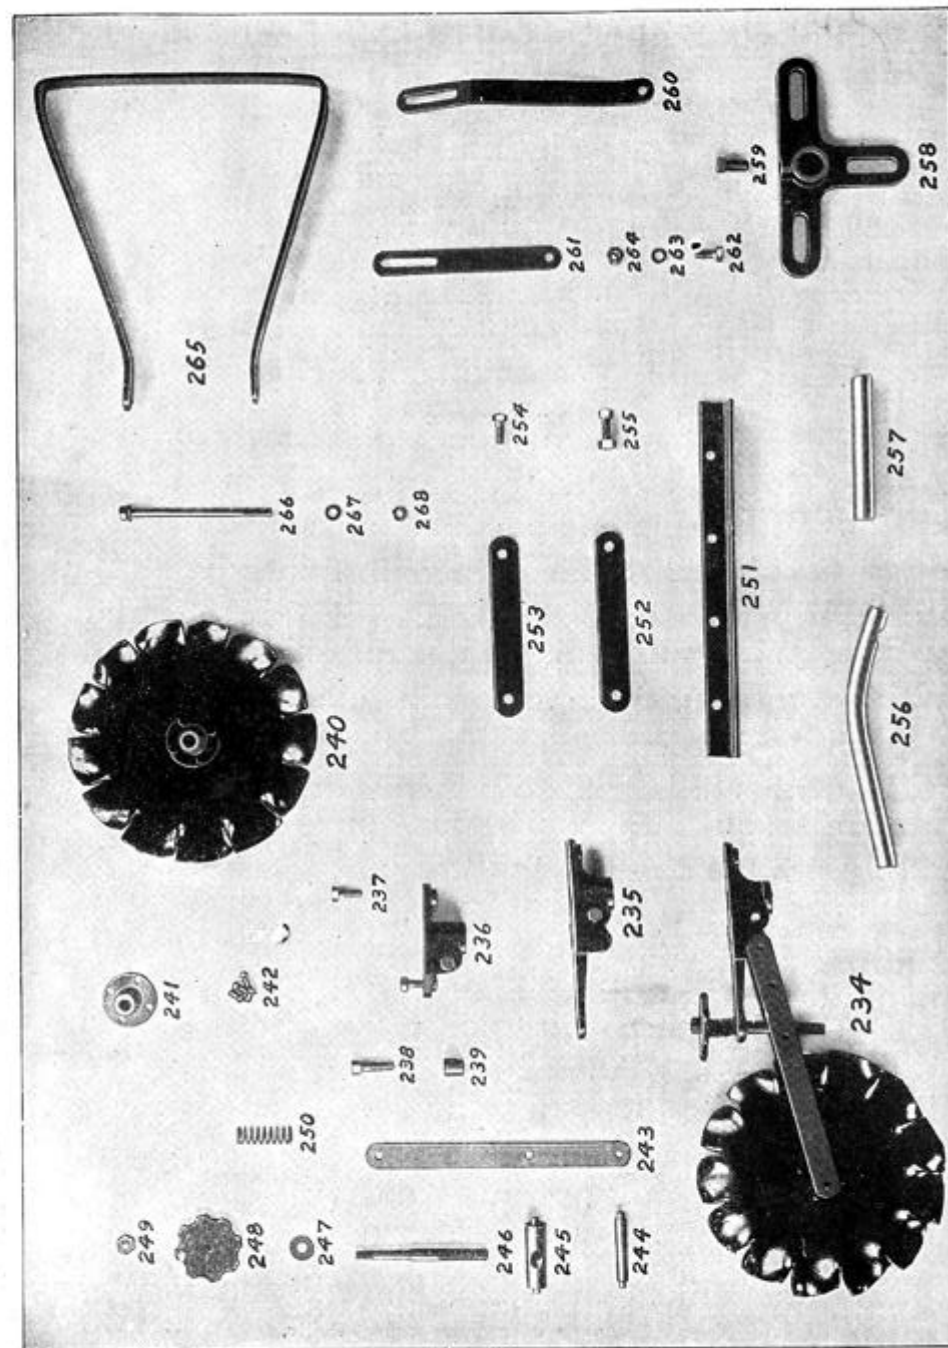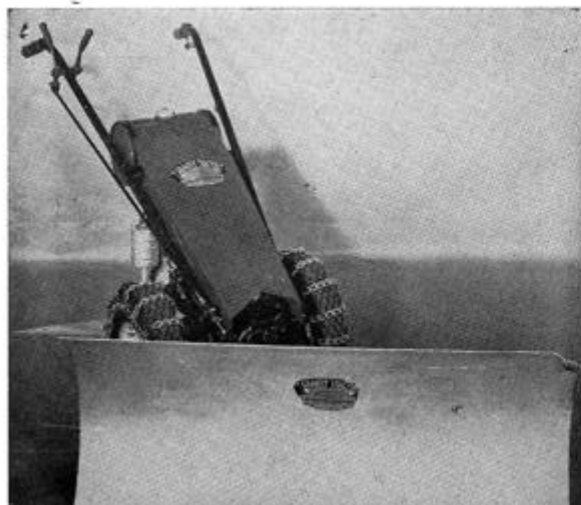

Price List on page 24.

**PARTS FOR WATER BALLAST ROLLER**

Part No.	Name of Part	No. Req.	Price Each
A-326	Frame	1	\$ 5.00
A-327	Draw bar	1	3.40
A-327-A	Draw bar eye	1	.32
	18"x24" roller	2	14.50
5809	Seat spring	1	2.55
	Seat	1	1.35
160-S	Seat bolt	1	.03
211-N	Seat bolt nut	1	.03
121-S	Bearing bolt	4	.06
111-S	Bearing bolt	4	.05
111-S	Draw bar bolt (rear)	1	.05
137-S	Seat spring bolt	2	.06
205-N	Draw bar nut	3	.04
305-W	1/2" washer	11	.01
L-228	Attachment boss	1	1.32
A-322	Pivot pin	1	.16
152-S	Tool frame bolt	4	.04
606-C	Cotter pin	2	.02
A-336	SKF Bearing Pillow block	1	6.60
A-101	Rear tool holder	1	5.00
	Water ballast roller complete with hitch		\$45.00

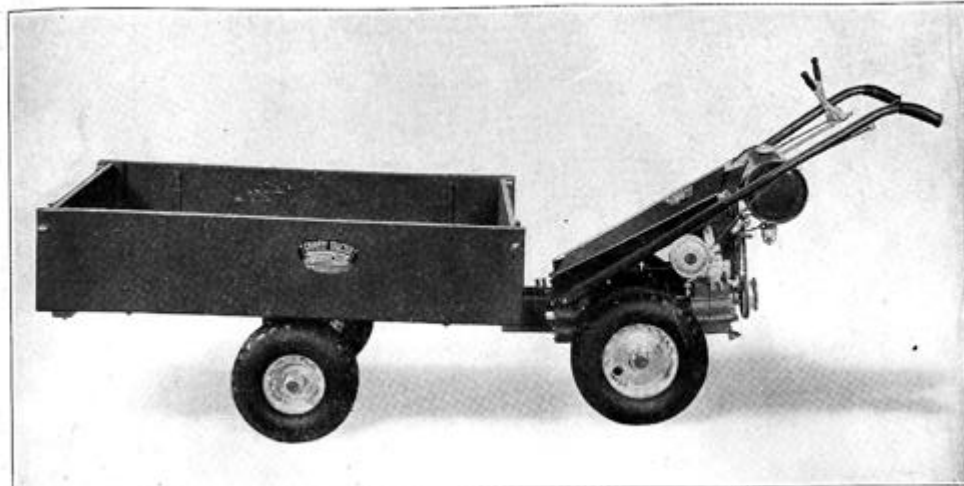


**PARTS USED ON CARTS**

A-107	Knuckle bracket	\$ 2.40	A-319	Draw bar rivets	.06
A-108	Knuckle fork	2.10	#1624	Alumite fitting	.18
A-109	Swivel bracket	2.80	5/16-18x1"	Knuckle pin set screw	.05
A-110	Axle bracket	4.80	3/8-16x3/4"	Axle set screw	.12
A-111	Body rest	1.70	219-N	Axle nut	.06
A-112	Body latch	.80	606-C	Axle nut cotter pin	.01
A-315	Knuckle pin	.32	3/8x3-1/4	Carriage bolt for axle bracket	.09
A-316	Body latch pin	.08	3/8x2-3/4	Carriage bolt for body rest	.08
A-317	Draw bar	1.20	A-314	Body complete	9.00
A-318	Thrust collar	.90	A-321	Wheels—complete	10.00
A-310	Axle	2.00		Transportation Cart complete	\$45.00



**Model L Gravelly with Water Ballast Roller.**

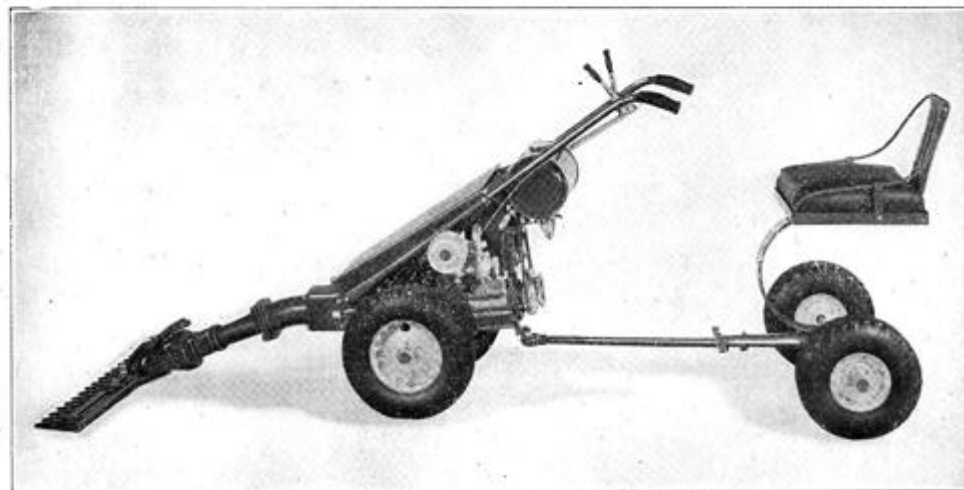

**PARTS FOR 40 MODEL RIDING SULKY**

Part No.	Name of Part	No. Req.	Price Each	Part No.	Name of Part	No. Req.	Price Each
A-104	Frame	1	\$ 2.20	201-N	Draw bar bolt nut	1	.02
A-106	Clevis	1	.65	210-N	Pivot bolt nut	1	.02
A-303	Seat spring	1	2.55	220-N	Pivot stud nut	2	.01
A-304	Bracket	1	.20	308-W	1/2" lock washer	1	.01
A-305	Pivot bushing	1	1.00	305-W	1/2" lock washer	2	.01
A-306	Pivot bolt	1	.92	304-W	5/16" lock washer	4	.01
A-307	Swivel stud	1	.40	303-W	1/4" lock washer	1	.01
A-308	Pivot stud	2	.10		Wheels	2	10.00
A-309	Draw bar	1	.65	219-N	Axle nut	2	.06
A-310	Axle	1	.80	606-C	Axle nut cotter	2	.01
A-311	Axle U bolt	2	.16	5860	Seat	1	9.75
149-S	Draw bar bolt	1	.06	L-617	Hub caps	2	.20
152-S	Seat spring bolt	4	.04		Alumite fitting	2	1.15
211-N	Spring bolt nut	4	.03		Steel seat	1	1.35
214-N	U bolt nut	4	.03		Riding sulky complete		\$ 30.00



GRAVELY SICKLE TYPE MOWER

The GRAVELY Sickle Mower comes to you just as nearly assembled as it is practical for shipping purposes. Let us briefly list the necessary steps to complete the job.

The Mower comes to you in two main parts. The large, completely assembled, aluminum-colored castings are called the Drive Mechanism. The other part is the Cutter Bar complete. Bolt the Drive Mechanism into the holes on the assembled Cutter Bar. Use the two  $\frac{1}{2}$ " Bolts as furnished. They screw directly into the Bar. Get them good and tight. Always watch these particular Bolts when using the Sickle Mower. If you lose any Washers, be sure and replace them for it is highly important this particular part is kept tight.

This sickle Mower attaches to the front of the Tractor like the other power attachments.

DON'T FORGET BEFORE USING TO OIL THE MOWER. REMOVE THE TWO OIL PLUGS FOUND ON TOP OF THE GEAR HOUSING OF THE DRIVING MECHANISM. FILL EACH WITH A  $\frac{1}{2}$  PINT OF GARGOYLE MOBIL OIL "C" (S.A.E. 140 GEAR OIL) OR ITS EQUIVALENT. ALWAYS KEEP WELL LUBRICATED. NEVER USE HEAVY GREASE. IF GEAR OIL IS NOT OBTAINABLE USE MOTOR OIL.

Upon request Skids are sent with each Mower. For most of your work you will not find it necessary to use these. With them you can further regulate the cut. If four are used put directly under the first and fifth guards from either end. The Guard Bolts are removed and the Skid Bolts put in the vacant holes, using the same Guard Nuts. Two small Adjusting Spacers are furnished with each Skid. One or both of these can be used, and which further regulates the depth or height of the cut.

A patented and highly important feature found on the GRAVELY Mower is the SWIVEL ACTION OF THE CUTTER BAR. On the upper part of the two Crank Housings castings you will find four nuts and bolts. The first two on either side, and closer to the tractor proper, effect the swivel. With these nuts tight, the bar is held rigid. But, loosen them and you will have the SWIVEL ACTION. For mowing level ground the bar swivel can be tight. But for hillsides it should be loosened to allow the bar to follow the slope of the ground while the tractor remains upright. DON'T HAVE THE SWIVEL LOOSE ENOUGH TO TURN WITHOUT SOME PRESSURE. It should be just tight enough to hold its position until lowered, when its own weight should cause it to tilt according to the slope of the ground.

Best results are secured by running at an easy walking speed. DON'T RACE YOUR MOTOR. If you get into grass that you cannot cut without racing the motor, SHARPEN THE KNIVES. Racing is hard on the machine and makes you more likely to break something in case you hang in wire or anything that the knives won't cut. At a moderate speed you can cut from three to four acres per day, and if your motor does stall you will not do any damage beyond a nick in the knife.


#### SUGGESTIONS FOR SECURING THE BEST MOWING RESULTS

A SHARP SICKLE. Any kind of a dull, gapped sickle-bar will cut coarse weeds and bushes, but when you get into fine grass you will have trouble if your knives are dull. Keep them sharp. To remove the cutting knife complete to sharpen for instance, remove the Knife Bracket Screws and slip the blade out on either side. ALWAYS KEEP THESE SCREWS REAL TIGHT. If they are even a little loose there is danger of stripping the threads. Sharpen the knives often. They will hold an edge longer, will not nick so easily and will cut equally as well if ground at an angle of 45 degrees, or about the same as scissors are ground. (A small Hand Sickle Grinder with a proper curved wheel, will pay for itself time and again in better mowing results.)

See that the knife bar is straight and the points of the knives are in line so that the Sickle-bar will lay flat on the guards.

Keep the guards in alignment. If one guard gets knocked up and the other down it will not cut fine grass. Use a light hammer and knock the guards up or down until the knives on the sickle-bar lay flat in contact with the shearing edges of the guards. Make sure that all the guard bolts are drawn tight. Adjust the clips that hold the sickle-bar closely, but do not allow them to bind. The knife should slide back and forth easily with the pressure of finger and thumb. It is not necessary to lubricate the knife as the grass will furnish lubrication, but a few drops of machine oil on the sections will help to prevent rust and sometimes make for easier running.


If these few directions are followed your Mower will last almost indefinitely. Keep out of wire, iron, rocks, tin cans, and so on. If the GRAVELY Mower is kept properly adjusted and sharpened it does its work so easily that mowing becomes a pleasure instead of one of the dreaded jobs. It will mow anything from wire grass to locust sprouts, and will do it cleaner, better and easier than any mowing machine built.

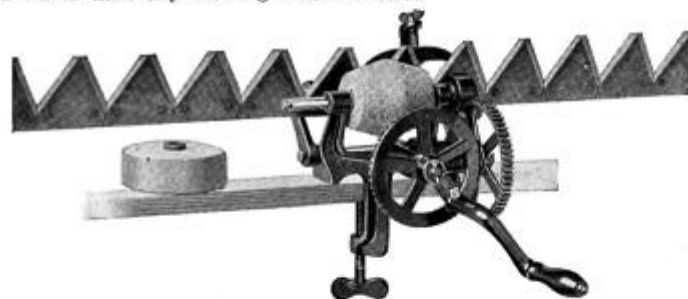

CUT OF SICKLE GRINDER

A hand Sickle Grinder like the one illustrated is a great help in keeping the knives sharp. This means better cutting and less cost for replacing.



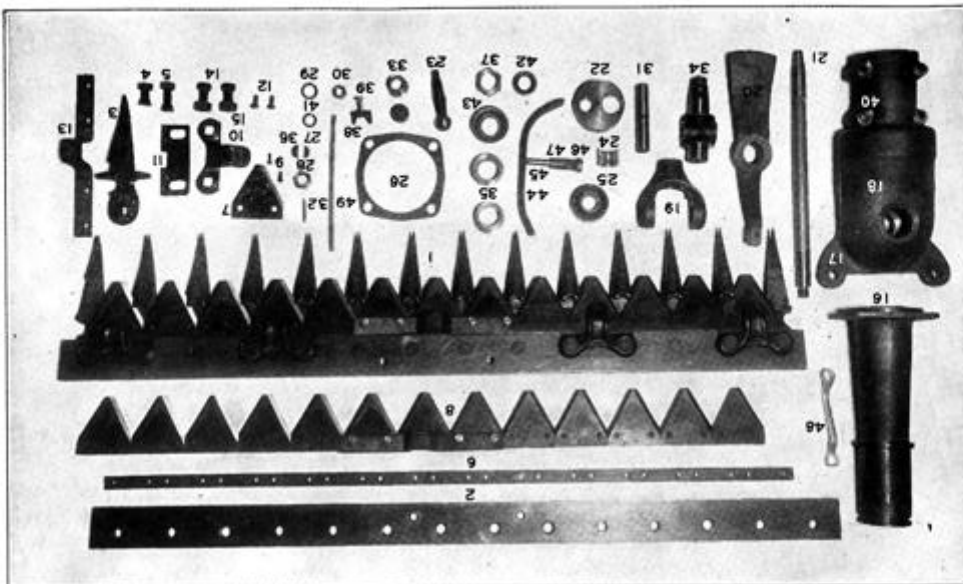

NOTE: Cutter bars come in 3 sizes, 2", 2 1/4" & 3". The same Photo No. is used to illustrate. Use Part No. to order by.

Photo Parts No. Description No. Price Req. Each

**3" REGULAR CUTTER BAR—42" Long**

1	3300	3" bar with knife & bracket	\$15.00
2	3301	Guard bar	1.83
3	3302	Guard	.48
4	3303	Guard bolt, short	.06
5	3304	Guard bolt thru clip, long	.06
6	3305	Knife, back	1.35
7	3206	Knife section, .09 ea. (box 25)	1.25
8	3306	Knife, complete	3.50
9	3307	Knife rivets, .01 ea.	.25 lb.
10	3309	Knife clips	.15
11	3310	Wearing plates	.15
12	4014	Knife drive bracket screws	.05
13	201-N	Bracket lock nuts	.02
14	3183	Knife drive bracket	.39
15	152-S	Guard bar sec. bolt	.04
15	217-N	Guard bar sec. bolt nut	.03
311-W	311-W	Knife dr. br. washers	.01
44	3211	Skids	.16
45	3212	Skid bolts	.06
46	209-N	Skid nuts	.02
47	3213	Skid spacers	.06
4&5	3312	Guard bolt nut	.02

**2" CLOSE CUTTER BAR—40" Long**

1	3500	2" Bar with knife & bracket	\$15.00
2	3501	Guard bar	1.83
3	3502	Guard	.48
4	161-S	Guard bolt, short	.06
5	3508	Guard bolt, long	.06
6	3505	Knife, back	1.35
7	3506	Knife sections .09 ea. (box 25)	1.25
8	3507	Knife, complete	3.50
9	3511	Knife rivets, .01 ea.	.25 lb.
10	3503	Clip	.15
11	3504	Wearing plate	.15
12	4014	Drive bracket screws	.05
201-N	201-N	Bracket lock nut	.02
13	3510	Knife drive bracket	.39
14	152-S	Guard bar sec. bolt	.04
15	217-N	Guard bar sec. bolt nut	.03
311-W	311-W	Knife dr. br. washer	.01
44	3512	Skids	.16
45	3513	Skid bolts	.06
46	205-N	Skid nuts	.02
47	3213	Skid spacers	.06
4&5	3509	Guard bolt nut	.06

**2 1/4" CUTTER BAR—40" Long**

1	3600	Cutter bar	\$15.00
---	------	------------	---------

Photo No.	Parts No.	Description	No. Price Req. Each
2	3601	Guard bar	1.83
3	3602	Guards	.48
4	3608	Guard bolt, short	.06
5	3611	Guard bolt, long	.06
6	3605	Knife, back	1.35
7	3606	Knife section, .09 ea. (box 25)	1.25
8	3607	Knife, complete	3.50
9	3307	Knife rivets .01 ea.	.25 lb.
10	3603	Clip	.15
11	3604	Wearing plates	.15
12	4014	Drive bracket screw	.05
201-N	201-N	Bracket lock nuts	.02
13	3610	Knife drive bracket	.39
14	152-S	Guard bar sec. bolt	.04
15	217-N	Guard bar sec. bolt nut	.03
311-W	311-W	Knife dr. br. washer	.01
3208	3208	Center section rivet	.01
44	3211	Skids	.16
45	3212	Skid bolts	.06
46	209-N	Skid nuts	.02
47	3213	Skid spacers	.06
4&5	3609	Guard bolt nut	.06
16	3107	Column	5.58
17	3114	Lower crank housing	5.00
18	3115	Upper crank housing	3.74
3191	3191	Crank Housing Gasket	.10
19	3116	Crank yoke	2.42
20	3117	Knife act. lever	2.55
21	3142	Crank shaft	1.58
22	3143	Crank disc	1.38
23	3144	Crank yoke ball stud	2.02
24	3145	Ball stud bearing	.95
25	3147	Crank shaft bearing	1.45
26	3167	Column gasket	.05
27	504-K	Crank disc, key	.01
28	207-N	Crank disc, nut	.02
29	307-W	Lock washer	.01
30	208-N	Ball stud nut	.02
31	3176	Crank yoke knuckle pin	1.20
32	3177	Knuckle pin lock rivet	.01
33	3178	Knuckle pin bearing	.45
34	3179	Actuating lever shaft	3.00
35	3180	Lever shaft bearing	.45
36	505-K	Actuating lever key	.01
37	3181	Actuating lever nut	.05
38	3182	Actuating lever wearing tip	.80
39	1608	Wearing tip bolt	.07
40	3185	Crank housing bolt	.06
41	305-W	Lock washer	.01
42	L-126	Oil seal	.45
43	3151	Oil seal retainer	.06
48	2810	Box wrench	.95
49	3173	Swivel cork seal	.03


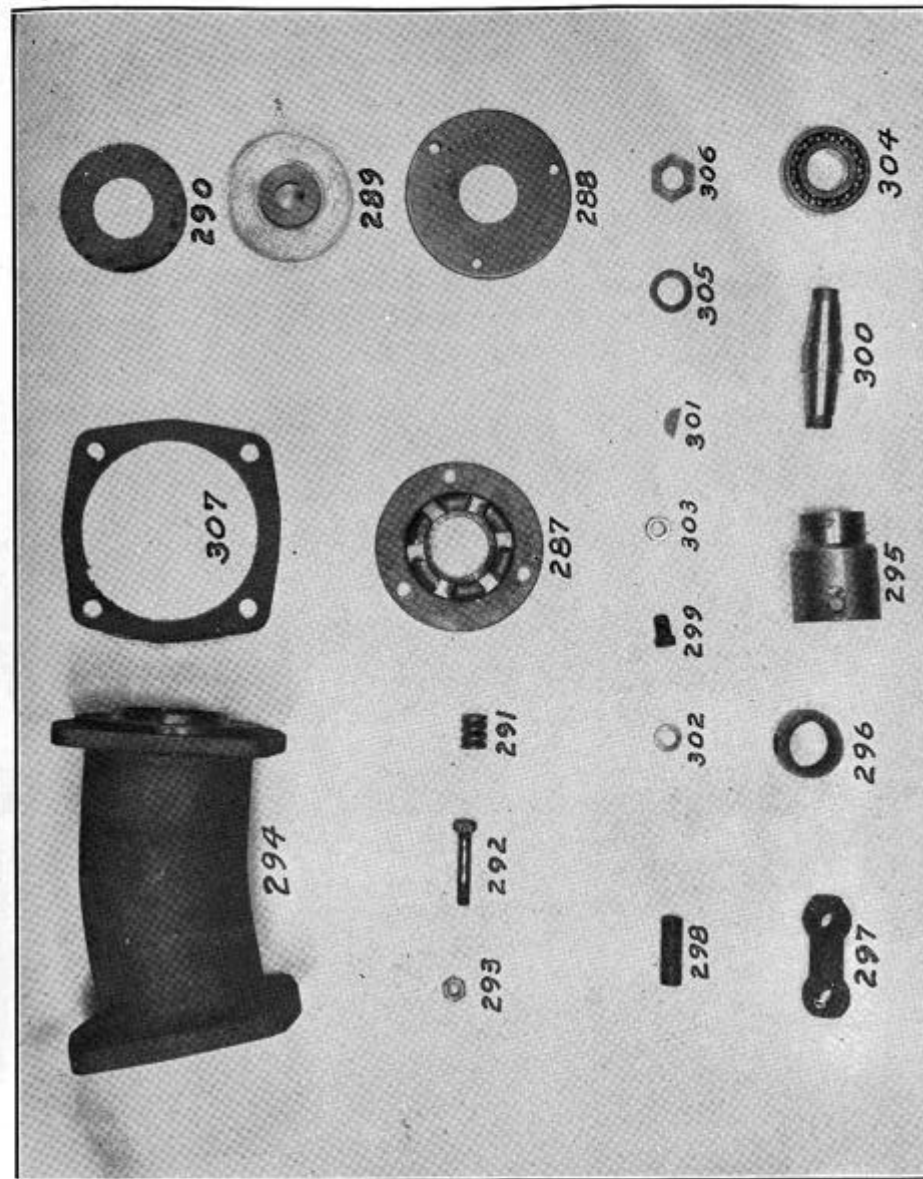


Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
287	SC-30	Dog plate	\$ 3.90	297	3197-C	Link	1.02
288	SC-32	Back plate	.50	298	3197-D	Pivot pin	.38
289	SC-33	Drive plate	.95	299	3197-E	Pivot stud	.64
290	SC-34	Friction washer	.16	300	3197-F	Stud shaft	.84
291	SC-35	Spring	.05	301	504-K	Stud shaft key	.02
302	SC-36	Drive stud	.08	302	305-W	Pivot stud lock washer	.01
292	167-S	Spring bolt	.04	303	220-N	Pivot stud nut	.01
293	215-N	Spring bolt nut	.02	304	3197-G	Stud shaft bearing	2.56
304-W	304-W	Spring bolt nut washer	.01	305	309-W	Stud shaft lock washer	.02
		Safety clutch, complete	6.30	306	1304	Stud shaft nut	.07
294	3197	Universal housing	4.00	307	5056	Universal housing gasket	.08
295	3197-A	Universal cup	2.40			Universal assembly, complete	20.00
296	3197-B	Center ring	1.00				

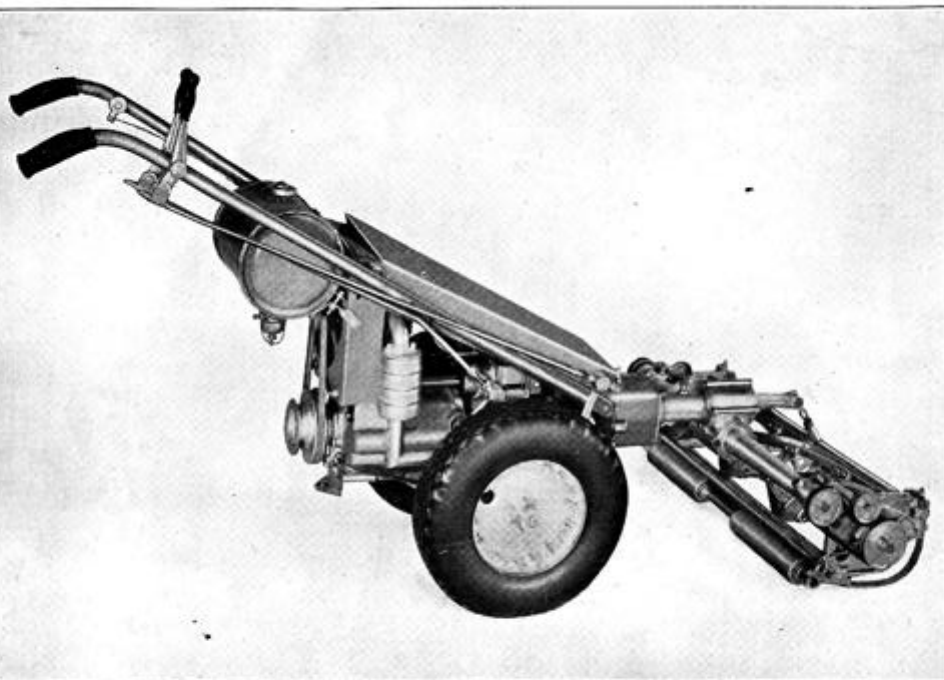

## Instructions For Using The Rotary Mower

(Both Gang and 30")

The GRAVELY Rotary Mower is designed to operate without wheels, having only rollers or shoes, mounted on the Bed Knife Bar to gauge the Height of the Cut and to carry the weight, which latter is partly counterbalanced by the Tractor. This arrangement, with scalping shoes or runners located at either end, gives a more even cutting machine and one which will go in and out of gulleys without skinning.

### ONE SINGLE ADJUSTMENT FOR HEIGHT

The Adjustment for the Height of the Cut is made through a Turn Buckle located between the Mower Column and the center of the Reel Frame. To raise or lower the Height of the Cut, you rock the entire mower assembly back and forth. When the wing units are used in the Gang, the height of cut must be adjusted to correspond with that of the Center Unit and the adjustment is made with the screw which rests on the Leader.

### LUBRICATION

The Column Swivel is equipped with a grease cup which can be given an occasional quarter turn and should be refilled when empty. After one season the Gears should be checked. Remove the cap from the Gear Housing and empty the old lubricant, then replace with four ounces of Mobiloil "C" (SAE 140) Gear Oil) or its equivalent. Too much oil will result in overheating. All Reel Bearings are of the Grease Seal Type and require no lubrication. Other parts such as Pivot Pins and Friction Surfaces which need lubrication are spotted with red paint and should be oiled occasionally with a squirt can.

### REEL ADJUSTMENT

The Reel is carried in Floating Type Bearings, which are pivoted to the End Frames and rest on adjusting screws with a spring over each bearing. These help to maintain the contact. The object of this construction is to allow the Reel to rise with the Bed Knife when striking stones or other undulations, thus preventing sheared or otherwise damaged cutting edges. The Reel should be lifted occasionally by hand to see that the bearings are working freely on their pivots. If not given the proper attention, it is possible that the Reel will fly up and stick should a heavy object be struck. This would cause the Mower to stop cutting.

If your Mower is not cutting smoothly, see that the Reel is set down close enough to the Bed Knife and that it is touching lightly along its entire length. Use a piece of paper to make this test. Back up the adjusting screws carefully at each end so as to get the proper cutting contact. If the adjusting screws are backed up too far, the full weight of the Reel will rest on the Bed Knife, causing undue wear.

### WING UNITS

The wing units can be attached or disconnected in 30 seconds when using the Gang Mower. All that is required is the insertion of, or removal of the leader pin and a quick manipulation of the knurled collar on the Wing Drive Chuck.

### BACKGRINDING THE REEL


If during the mowing season the Reel should become rough or dull, you can improve this condition greatly simply by Backgrinding the Reel on the Bed Knife with the aid of an emery and oil solution. Cross the Vee Belt so that the Reel will run in the opposite direction to that which it should run. Then with an old paint brush spread the emery solution across each blade of the Reel. After this has been done, run for a few minutes, and you will notice how the rough places smooth out and the blades are much sharper.

To Backgrind the Wing Units simply place them on the side opposite to that which they should be when mowing.

### REEL SHOULD BE SHARPENED ONCE A SEASON



Do not think, however, that this Backgrinding process will take the place of grinding the Bed Knife and Reel on a regular grinding machine—it will not. No less than once a year your Reel should be taken off and ground by an experienced lawn mower mechanic properly equipped to do this work. A sharp Reel lightly adjusted to a sharp Bed Knife is of the utmost importance for good mowing.

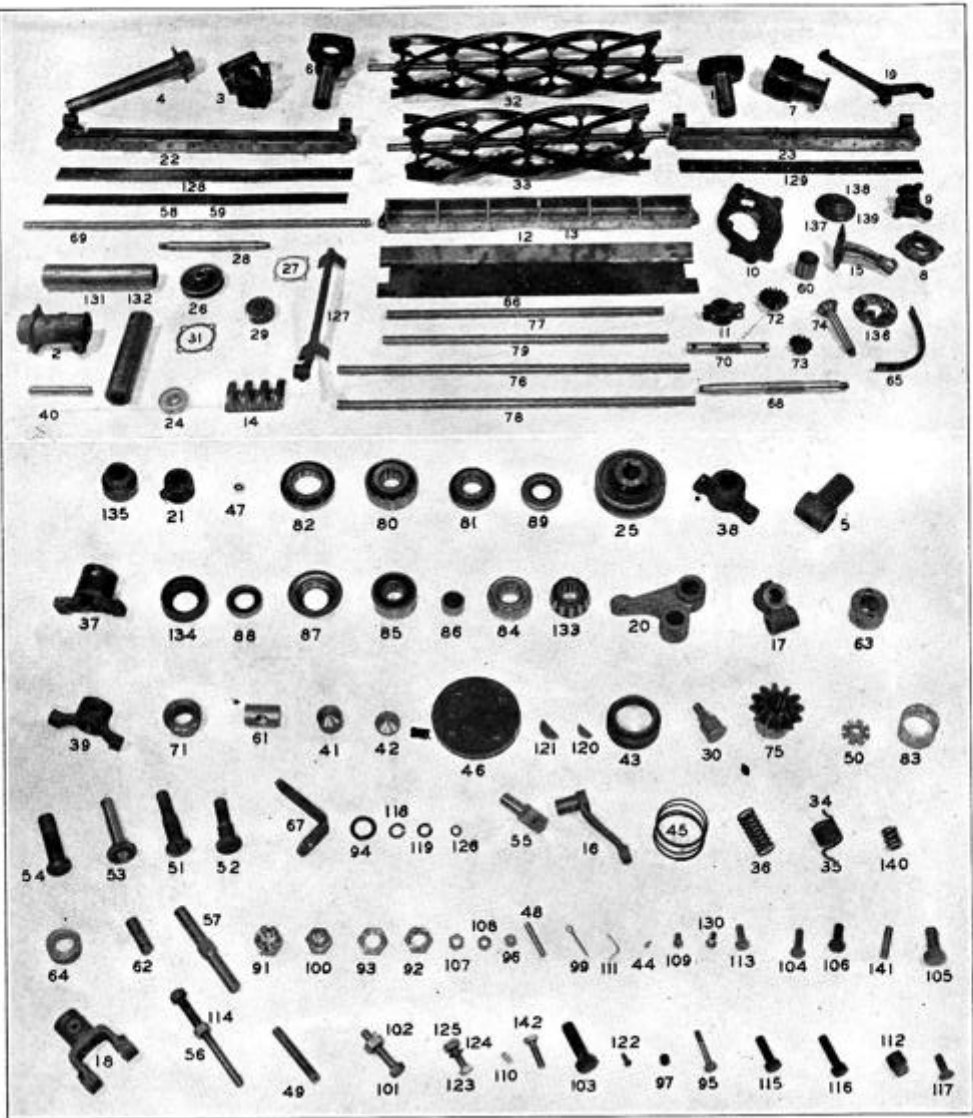

### PARTS LIST PLATE 15

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
1	M-101	Drive shaft housing.....	\$ 3.00	12	M-121	30" Bed Knife shoe bar...	5.12
2	M-102	Swivel casting.....	2.50	14	M-123	Bed knife shoe.....	.60
3	M-103	Gear housing.....	7.00	15	M-124	Strut.....	1.20
4	M-104	Cross tube.....	2.80	16	M-125	Idler arm.....	.60
5	M-112	Tee nut.....	.50	17	M-126	Leader pivot.....	.64
6	M-115	Drive shaft housing.....	4.40	18	M-127	Leader swivel.....	.50
7	M-116	Take off housing.....	3.20	19	M-128	Leader.....	1.68
8	M-117	Bearing cap.....	1.00	20	M-129	Leader adjusting bracket..	1.20
9	M-118	Cross tube end.....	1.20	21	M-133	Thrust collar.....	.20
10	M-119	End casting.....	2.20	22	M-134	30" bed knife bar.....	8.68
11	M-120	Reel bearing housing.....	.92				

### PARTS LIST PLATE 15 (Cont.)

Photo No.	Part No.	Name	Price	Photo No.	Part No.	Name	Price
23	M-135	25" Bed Knife Bar.....	\$ 5.40	89	M-381	Oil Seal.....	.75
24	M-136	Idler Pulley.....	1.36	90	M-382	Vee Belt.....	.60
25	M-137	3" V Pulley (state whether wide or narrow belt).....	.60	91	219-N	Spiral Gear Nut.....	.06
26	M-138	4" V Pulley (state whether wide or narrow belt).....	.66	92	219-N	Bevel Gear Nut.....	.06
28	M-308	Drive Shaft.....	1.00	93	1304	Drive Shaft Nut.....	.10
29	M-318	Spiral Gear.....	3.00	94	309-W	Lock Washer.....	.02
30	M-321	Swivel Grease Cup.....	.12	95	M-383	Leader Clamp Bolt.....	.08
31	M-326	Gear Housing Gasket.....	.03	96	202-N	Leader Clamp Bolt Nut.....	.02
32	M-339	30" Reel.....	22.50	97	801-A	1/4" Allen Set Screw.....	.07
33	M-340	25" Reel.....	20.00	98	M-384	Take-Off Housing Gasket.....	.04
34	M-342-R	R. H. Torsion Spring.....	.10	99		Cotter Pin.....	.01
35	M-342-L	L. H. Torsion Spring.....	.10	100	211-N	Center Adj. Lock Nut.....	.03
36	2723	Reel Spring.....	.05	101	124-S	Wing Adjusting Screw.....	.03
37	M-343-A	Take Off Sp.der.....	2.20	102	205-N	Wing Adj. Lock Nut.....	.04
38	M-343-B	Wing Spider.....	2.40	103	173-S	Tie Rod Cap Screw.....	.04
39	M-343-C	Center Spider.....	1.68	104	174-S	Idler Bearing Screw.....	.02
40	M-343-D	Spacer Shaft.....	2.28	105	160-S	Take-Off Housing Bolt.....	.03
41	M-343-E	Long Core Plug.....	.12	106	121-S	Gear Housing Bolt.....	.06
42	M-343-F	Short Core Plug.....	.06	107	201-N	Pivot Stud Nut.....	.02
43	M-343-G	Locking Ring.....	.80	108	220-N	Idler Pivot Lock Nut.....	.01
44	M-343-H	Locking Ring Stop.....	.03	109	169-S	Reel Stop Securing Screw.....	.03
45	M-343-I	Locking Spring.....	.07	110		Alemite Grease Fitting.....	.07
46	M-343-J	Universal Rubber Disc.....	.40	111	M-385	Spring Winder Lock Pin.....	.02
47	M-343-K	Locking Ball.....	.03	112	705-P	Oil Plug.....	.03
48	M-343-L	Spacer Shaft Rivets.....	.08	113	128-S	Scalping Shoe Bolt.....	.02
49	M-344	Idler Pivot.....	.12	114	206-N	Reel Adjusting Screw Nut.....	.04
50	M-345	Idler Spring Winder.....	.24	115	111-S	Bed Knife Bar Bolt (Short).....	.05
51	M-346	Long Pivot Stud.....	.48	116	112-S	Bed Knife Bar Bolt (Long).....	.05
52	M-347	Short Pivot Stud.....	.48	117	141-S	Bed Knife Shoe Bolt.....	.03
53	M-348	Leader Swivel Stud.....	.48	118	305-W	Bed Knife Bar Lock Washer.....	.01
54	M-349	Leader Pin.....	.72	119	304-W	Scalping Shoe Lock Washer.....	.01
55	M-350	Reel Stop.....	.28	120	504-K	No. 9 Woodruff Key.....	.02
56	M-351	Reel Adjusting Screw.....	.16	121	506-K	No. 13 Woodruff Key.....	.02
57	M-352	Mower Adjusting Screw.....	.48	122		Guard Rivet.....	.01
58	M-353	30" Bed Knife Steel.....	3.28	123	111-S	Guard Bolt.....	.05
60	M-355	Bearing Spacer.....	1.12	124	305-W	Guard Bolt Lock Washer.....	.01
61	M-356	Mower Adjusting Nut.....	.25	125	205-N	Guard Bolt Nut.....	.04
62	M-360	Reel Rearing Pivot Pin.....	.08	126	303-W	Leader Clamp Bolt Lock Washer.....	.01
63	M-361	Reel Thrust Collar.....	.52	127	M-140	Wing Rack.....	1.20
64	M-362	Pulley Spacer.....	.12	128	M-319-L	30" Bed Knife Steel.....	1.00
65	M-363	Scalping Shoe.....	.32	129	M-319-S	25" Bed Knife Steel.....	1.00
66	M-364	Reel Guard.....	.72	130	175-S	Bed Knife Securing Screw.....	.01
67	M-365	Reel Guard Bracket.....	.20	131	M-387	Steel Roller 10" Long.....	1.97
68	M-366	Drive Shaft.....	1.40	132	M-388	Steel Roller 8 1/4" Long.....	1.88
69	M-367	Cross Shaft.....	2.20	133	M-389	Steel Roller Bearing.....	.52
70	M-368	Take Off Shaft.....	1.72	134	M-390	Felt Closure.....	.15
71	M-369	Bearing Seat Bushing.....	.56	135	M-386	Roller Adj. Collar.....	.30
72	M-370	Bevel Gear.....	4.40			Safety Clutch Complete.....	6.30
73	M-371	Bevel Pinion.....	3.00	136	SC-30	Dog Plate.....	3.90
74	M-372	Miter Gear.....	4.62	137	SC-32	Back Plate.....	.50
75	M-373	Miter Gear.....	3.09	138	SC-33	Drive Plate.....	.95
76	M-374	30" Tie Rod.....	.96	139	SC-34	Friction Washer.....	.16
77	M-375	25" Tie Rod.....	.80	140	SC-35	Friction.....	.06
78	M-376	30" Roller Rod.....	.88	141	SC-36	Drive Stud.....	.08
79	M-377	25" Roller Rod.....	.64	142	167-S	Spring Bolt.....	.04
80	3147	Drive Bearing.....	1.45	107	204-N	Spring Bolt Nut.....	.02
81	6013	Pinion Shaft Bearing.....	1.13			Spring Bolt Nut Washer.....	.01
82	M-378	Take-Off Shaft Bearing.....	1.70			M-382A Vee Pulley Belt (narrow).....	.60
83	L-531	Stabilizer Bearing Bushing.....	.36			M-382B Vee Pulley Belt (wide).....	.60
84	M-323	Cross Shaft Outer Bearing.....	2.05				
85	M-379	Reel Bearing.....	1.92				
86	M-380	Idler Bearing.....	1.25				
87	3151	Oil Seal Retainer.....	.06				
88	L-126	Oil Seal.....	.45				

**GRAVELY MOTOR PLOW  
& CULTIVATOR CO.,  
Dunbar, West Va.**

**PARTS ORDER BLANK**

Gentlemen: \_\_\_\_\_ Date \_\_\_\_\_ 19\_\_\_\_  
 Ship the parts specified below to following address.

By \_\_\_\_\_ Specify Parcel Post, Express or Freight

Name \_\_\_\_\_ Party to whom goods are to be shipped

P. O. Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_

Shipping Point \_\_\_\_\_

If different from Post Office

**INDEX**

	Page
LETTER OF APPRECIATION .....	2
UNCRATING AND SETTING UP .....	4
OPERATION AND CARE OF TRACTOR .....	4-5
THINGS TO DO TO AVOID TROUBLE .....	6
WHAT TO DO IN CASE OF TROUBLE .....	7
MINOR SERVICING PROBLEM .....	7
SPARK PLUG ADJUSTMENT .....	7
CARE OF TIRES .....	7
DIAGRAM OF CONTROL OPERATION .....	8
PARTS ILLUSTRATIONS AND PRICE LIST .....	9 to 17, 21, 22, 27, 32, 33, 36, 37
SLIP CLUTCH AND ITS ADJUSTMENT .....	18
ORDERING PARTS—INSTRUCTIONS .....	19
ROTARY PLOW .....	20
BEAN-GRAVELY ESTATE SPRAYER .....	22
GEARED WHEELS .....	23
FRONT TOOL HOLDER .....	24
REAR TOOL HOLDER .....	25
SNOW PLOWS .....	26
WATER ROLLER ILLUSTRATION .....	28
TRANSPORTATION CART .....	29
SULKY .....	29
SICKLE TYPE MOWER .....	30
SICKLE GRINDER .....	31
ROTARY MOWER .....	34-35

Quantity	Part Number	DESCRIPTION	Do not enter Price

Tractor Serial No. \_\_\_\_\_

If part required is not listed in catalog, describe on reverse side. Signed \_\_\_\_\_

