

The Mountaineer Lawn & Garden Tractor

At Last,

A multi-purpose machine, engineered and built to tackle all of your lawn and garden tasks.

- **LAWN MAINTENANCE**—from small city lots to rolling country estates and large, well-groomed commercial and public grounds.
- **ROUGH MOWING & CLEARING**—thick, tall meadow grass to light brush and undergrowth.
- **GARDEN PLOWING**—a perfect seed bed in one operation even in virgin, hard and rocky soil conditions.
- **GARDEN CULTIVATING**—virtually anything from composting heavy organic matter into soil to delicately pulling-up weeds between rows without disturbing crops.
- **LANDSCAPING**—soil preparations, redistribution, leveling.
- **SNOW REMOVAL**—by dozing or two-stage blower.

Yes,


A MOUNTAINEER TRACTOR can handle all these jobs—with ease. In fact, one MOUNTAINEER TRACTOR coupled with the proper attachments can replace up to nine machines (i.e., lawn mower, mulcher, estate mower, bush hog, plow, tiller, dozer, scoop, snow blower, and trencher). Just think of the money you can save—without sacrificing performance—with the versatile, all season MOUNTAINEER TRACTOR.

Quality,

FIRST, premium grade materials are used throughout the MOUNTAINEER LINE. Timken tapered bearings, stress-proof shafting, hardened precision gears with grooved bronze bushings, high alloy shifting gears, high strength ductile ring gears, and quality castings from two of the most modern foundries in the United States.

SECOND, and most important, a dedicated and proud group of highly skilled men, backed by the most modern in computer controlled machinery, build the quality and toughness you expect into every MOUNTAINEER product, at a PRICE YOU CAN AFFORD.

UNITED TO SERVE YOU BETTER

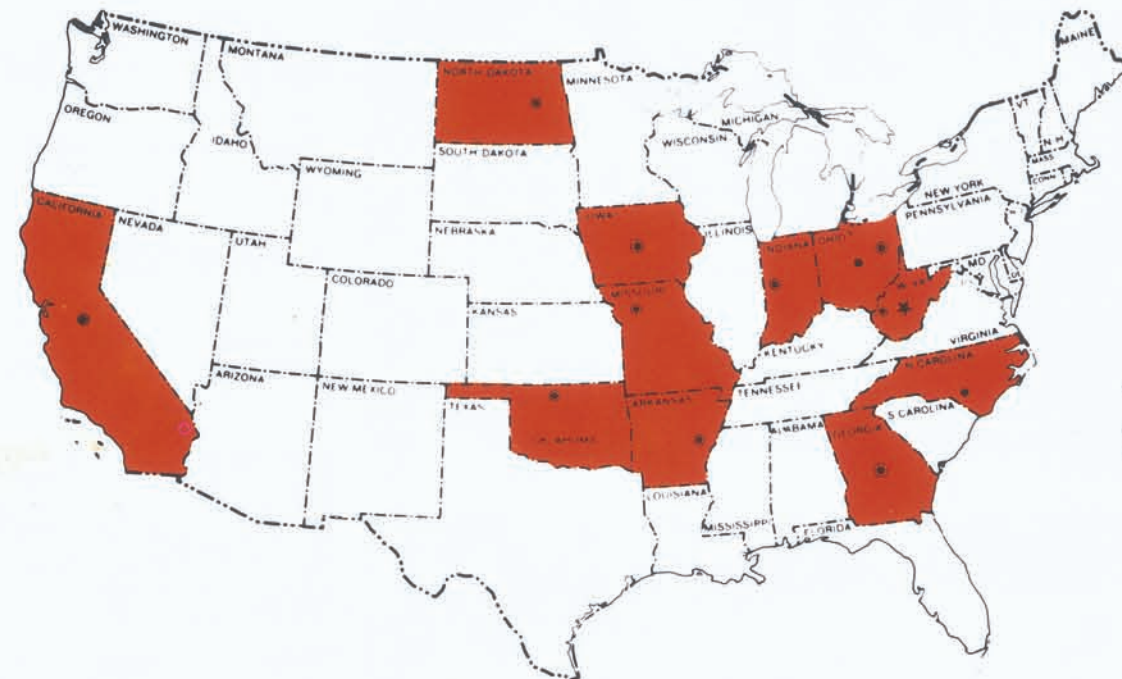

★ Executive & Finance Offices
● Sales Divisions
● Manufacturing Divisions

HOME OFFICE

United Farm Tools, Inc.
P. O. Box 9175
5604 MacCorkle Ave., SW
South Charleston, WV 25309
Phone 304/768-8221

MANUFACTURING DIVISIONS:

United Farm Tools, Inc.
P. O. Box 312
E. Service Rd. I-35
Bethany, MO 64424
Phone 816/425-7455

United Farm Tools, Inc.
Route 1, Box A
Wingate, IN 47994
Phone 317/275-2261

United Farm Tools, Inc.
P. O. Box 341
750 South 4th Ave.
Carrington, ND 58421
Phone 701/652-3197

SALES DIVISIONS:

United Farm Tools, Inc.
P. O. Box 731
1-95 West Frontage Rd.
Lumberton, NC 28358
Phone 919/738-9854

United Farm Tools, Inc.
H & H Division
Route #1
Big Prairie (Wooster), OH 44611
Phone 216/496-2601

United Farm Tools, Inc.
2032 N. Frontage Rd.
Turlock, CA 95380
Phone 209/632-3846

United Farm Tools, Inc.
Tri-State Division
P. O. Box 1688
506 South 4th St.
West Memphis, AR 72301
Phone 501/735-1450

United Farm Tools, Inc.
145 Edison Ave.
Circleville, OH 43113
Phone 614/474-8013

United Farm Tools, Inc.
4540 W. Washington St.
Charleston, WV 25313
Phone 304/744-5865

United Farm Tools, Inc.
P. O. Box 311
City Park Rd.
Oelwein, IA 50662
Phone 319/283-5451

United Farm Tools, Inc.
P. O. Box 307
206 S. Main St.
Tonkawa, OK 74653
Phone 405/628-2511



UNITED FARM TOOLS, INC., a West Virginia corporation was formed by joining a number of farm equipment manufacturers into one consolidated corporation.

The LAWN & GARDEN Division was formed in the late 1970's by a group of men with over 200 years cumulative experience in 2-wheel lawn & garden tractor design and manufacturing. Bolster this experience with the staff and production capabilities of nine (9) additional UFT manufacturing divisions representing a collective total of 239 years in the manufacturing of 35 lines of farm machinery ranging from fertilizer spreaders and tillage equipment to harvesting, grain handling and mills—that's experience and "know-how" you can count on for quality, service and innovative design. That's the experience that goes into every tractor and attachment we build.

UNITED FARM TOOLS, INC.



MOUNTAINEER TRACTOR AND ATTACHMENTS



United Farm Tools, Inc.

4540 W. WASHINGTON STREET • CHARLESTON, WV 25313

Phone 304/744-5865

THE MOUNTAINEER

The MOST TRACTOR for the BEST PRICE.

Quick Attachment Mounting—Two Nuts (Replaceable Studs), Two Bolts

Sturdy Handle Bar Weldment of Heavy Duty Tubular Steel with Rubber Grips

Tool Control Allows Engagement/Disengagement of Attachment Independent of Tractor Engine and Ground Speed

Throttle Control At Your Fingertips

Instant Forward—Neutral—Reverse In All 8 Gear Ranges

Manual Engine Choke Control


**PTO Speed Control
Hi—1350 RPM
Lo—540 RPM**

Replaceable Dry-Type Cartridge Air Filter

All Attachments with Adjustable Slip Clutch to Protect Engine and Attachment From Shock Load

8 or 12-HP Kohler Cast Iron Gasoline Engine with Internal Governor

Clutch Control to Positively Engage/Disengage Power Train From Engine




Model 88E4



Model 88E with Model 883



Model 88E with Model 884

MODEL 120E

Same tractor as 88E with the following changes. **Engine:** 12 HP electric start Kohler cast-iron engine. **Speed:** .75-6 mph. **Tires:** 18 x 8.50 x 8 pneumatic tires.

MODEL 120E4

Same tractor as 88E4 with the following changes. **Engine:** 12 HP electric start Kohler cast-iron engine. **Speed:** .75-6 mph. **Tires:** 18 x 8.50 x 8 pneumatic tires.

MODEL 883

The 30" Rotary Mower features welded, fabricated deck; all gear drive; single heavy-duty blade; and close trimming on both sides.



Rugged, heavy-duty skids help prevent scalping on rough ground. Skids easily replaced with removal of two bolts.

All gear drive in heavy duty castings. Timken tapered bearings and precision machined bevel gears used exclusively. Drive train proven in years of service driving off the PTO of 200 HP tractors.



Functional shape of deck allows for maximum mowing width with excellent trimming ability. Specially designed, heat-treated, air-lift blade lifts grass for even cutting.

Fabricated deck with unique raised chamber — Mows high grass and weeds, meadow grass and undergrowth with ease. Blade height adjust easily with ground spacers.

MODEL 884

The 40" Rotary Mower features all gear drive in cast-iron casting to horizontal spring-tensioned "V" Belts that drive 2 spindles with tapered roller bearings, two air-lift blades, adjustable cutting heights, front casters for maneuverability, and close trimming.

MODEL 885

The 60" Rotary Mower is similar in design to the Model 844 with three blades instead of two and industrial grade type B-V belting.

STANDARD TRACTOR FEATURES

- All Gear Drive—NO belts, NO chains, NO wear, NO slippage—Delivers Total Power All Of The Time.
- Patented Twin Planetary Transmissions and Gear Shifting Units that rotate precisely in an oil bath surrounded and protected by a massive cast-iron chassis casting.
- Well balanced and easy to handle.
- All Power Attachments
 - are designed and built tough enough for commercial and home owner use.
 - have independent tractor/mower swivel action to follow ground contour.
 - are equipped with an adjustable slip clutch to protect equipment from sudden, shock loads.



Model 88E with Model 882



Model 886



Models 88R with Model 888



Model 88E with Model 891



Model 88E with Model 893

MODEL 882

Dual wheels are required with all riding tractors for stability and operator safety. **Tires:** Includes 2, 16 x 4.80 x 8 tires, wheels, and wheel spacers.

MODEL 886

No Tractor/Rotary Plow can match the flexibility of the 8 Ground Speeds with its wide range in PTO speed (540 in Lo to 1450 in Hi). With all gear drive, all the power gets to the job . . . and lets the tool do the work, not you.

The Rotary Plow features all gear drive with bevel gears and high strength hex bore ductile drive casting, four heavy-duty steel blades, and easily adjustable plow angle for varying soil conditions.

MODEL 888

The Rotary Cultivator/Tiller will cultivate lightly or bust sod. Churn, aerate, mix, dig. Do virtually anything with the multitude of tine/wheel speeds available. It features all gear drive to the tractor, positive heavy-duty chain tine drive, 12" diameter hardened slasher tines, exclusive reversible tine rotation for landscaping and back filling, and quick mount depth wheels. **Tilling Width:** 26 inches.

MODEL 891

The Snow Dozer/Scraper Blade angles to the left, right, or straight ahead. The unit features a 1/4 inch blade with a special roll and an exclusive 4-position tilting feature.

MODEL 893

The Front Dump Scoop features quick release dumping from the handlebar position.

	Length	Width	Height	Weight	Min. Cutting Height	Max. Cutting Height
Model 882				35 lbs.		
Model 883	33"	31"	17"	150 lbs.	1 3/4"	3 1/4"
Model 884	39"	52"	16"	210 lbs.	1 3/4"	4"
Model 885	40"	72"	16"	245 lbs.	1 3/4"	4"
Model 886	34"	27"	20"	130 lbs.		
Model 888	42"	28"	20"	205 lbs.		
Model 891	21"	48"	23"	135 lbs.		
Model 893	20"	37"	11"	105 lbs.		

MODEL 88R

A walk behind model that can be converted to a rider. **Engine:** 8 HP recoil start Kohler, 4 cycle, 1 cylinder, cast-iron, gasoline, air cooled engine with internal governor and automatic compression release. **Speeds:** 8 forward ground speeds (.5 mph to 5 mph), 4 reverse speeds, and 2 PTO speed ranges (1350 in HI, 540 in LO). **Transmission:** Patented twin planetary transmissions and gear shifting units. **Drive:** All gear drive. **Clutch:** Internal clutch to positively engage/disengage power train; keyed, tapered axle shafts for positive power transfer to the wheels. **Differential:** Sturdy automotive-type. **Oil seals:** Double lip and spring reinforced. **Tires:** 16 x 6.5 x 8 pneumatic tires with turfsaver tread standard.

MODEL 88E

Same tractor as 88R above but with **Electric Start Option:** Includes keyed ignition switch, 12 volt battery, alternator, ampere gauge, and dual headlights.

MODEL 88R4

Same tractor as 88R above except 4-wheel riding model. Rider can be detached in 5 minutes for conversion to walker model.

MODEL 88E4

Same tractor as 88R4 above but with **Electric Start Option:** Includes keyed ignition switch, 12 volt battery, alternator, ampere gauge, and dual headlights.

14 HP 3000.00
Dutch wheels 152.95
60" 792.00
Steering 400.00
4349.95

	Length	Width	Height	Weight	Engine Oil Capacity	Transmission Oil Capacity	Fuel Capacity
Model 88R	61"	28"	37"	425 lbs.	1 U. S. qt.	6 U. S. qt.	1 1/2 U. S. gal.
Model 88E	61"	28"	37"	445 lbs.	1 U. S. qt.	6 U. S. qt.	1 1/2 U. S. gal.
Model 88R4	83"	39"	34"	585 lbs.	1 U. S. qt.	6 U. S. qt.	1 1/2 U. S. gal.
Model 88E4	83"	39"	34"	605 lbs.	1 U. S. qt.	6 U. S. qt.	1 1/2 U. S. gal.
Model 120E	61"	28 1/2"	37"	510 lbs.	2 U. S. qt.	6 U. S. qt.	1 1/2 U. S. gal.
Model 120E4	83"	39"	34"	650 lbs.	2 U. S. qt.	6 U. S. qt.	1 1/2 U. S. gal.